Office de la propriété
intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An Agency of
Industry Canada

Brevet canadien / Canadian Patent

♣ Le commissaire aux brevets a reçu une demande de délivrance de brevet visant une invention. Ladite requête satisfait aux exigences de la *Loi sur les brevets*. Le titre et la description de l'invention figurent dans le mémoire descriptif, dont une copie fait partie intégrante du présent document.

Le présent brevet confère à son titulaire et à ses représentants légaux, pour une période expirant vingt ans à compter de la date du dépôt de la demande au Canada, le droit, la faculté et le privilège exclusif de fabriquer, construire, exploiter et vendre à d'autres, pour qu'ils l'exploitent, l'objet de l'invention, sauf jugement en l'espèce rendu par un tribunal compétent, et sous réserve du paiement des taxes périodiques.
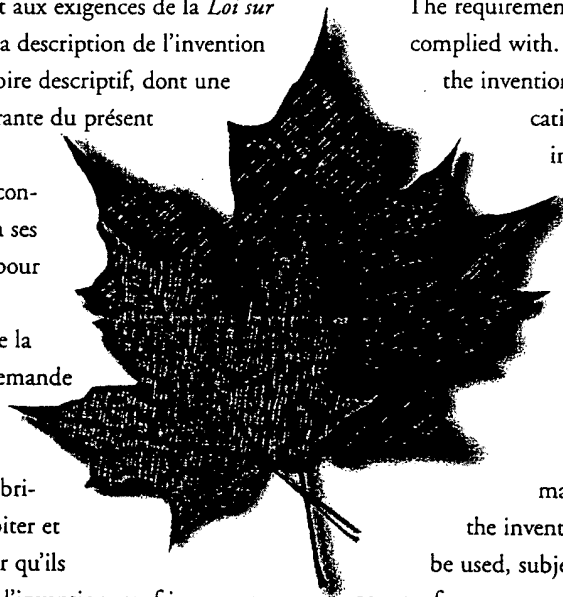
♣ The Commissioner of Patents has received a petition for the grant of a patent for an invention. The requirements of the *Patent Act* have been complied with. The title and a description of the invention are contained in the specification, a copy of which forms an integral part of this document.

The present patent grants to its owner and to the legal representatives of its owner, for a term which expires twenty years from the filing date of the application in Canada, the exclusive right, privilege and liberty of making, constructing and using the invention and selling it to others to be used, subject to adjudication before any court of competent jurisdiction, and subject to the payment of maintenance fees.

BREVET CANADIEN **2,087,973** CANADIAN PATENT

Date à laquelle le brevet a été accordé et délivré	**2001/01/23**	Date on which the patent was granted and issued
Date du dépôt de la demande	**1991/07/23**	Filing date of the application
Date à laquelle la demande est devenue accessible au public pour consultation	**1992/02/06**	Date on which the application was made available for public inspection

Canada

OPIC CIPO

3256 (CIPO 91)

(54) SEPARATEUR ABSORBANT DE GAZ, COMPORTANT UN ECHANGE INERTIEL D'ENERGIE

(54) ADSORPTIVE GAS SEPARATOR WITH INERTIAL ENERGY EXCHANGE
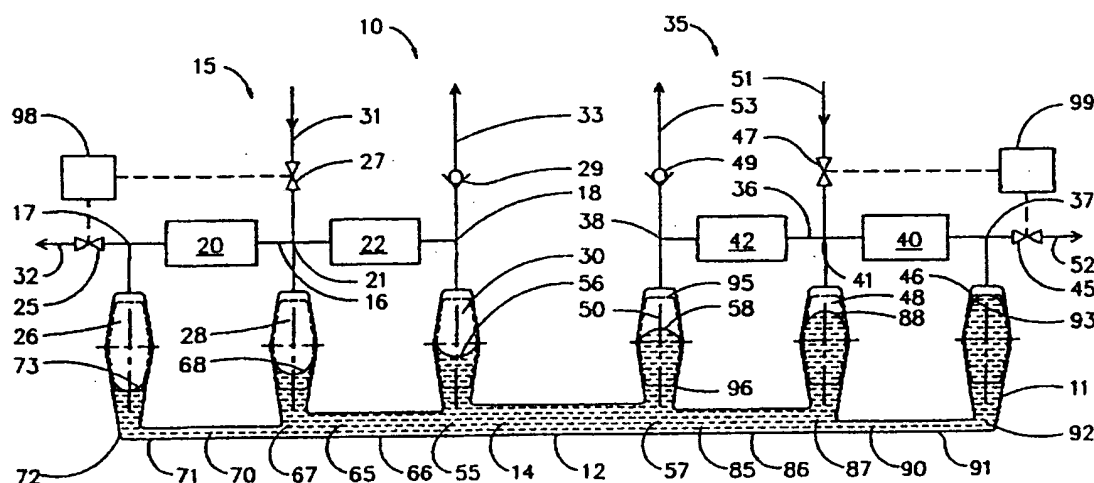
(57) On effectue la séparation d'un mélange gazeux par adsorption en oscillation de la pression, dans des premier et second espaces de travail qui ont des lits adsorbants en contact avec le chemin d'écoulement des chambres à déplacement variable. Les volumes des deux espaces de travail varient cycliquement en opposition de phase en fonction des oscillations d'une colonne de liquide dont les mouvements font varier le volume des chambres à déplacement variable de manière à obtenir des variations cycliques de pression dans chaque espace de travail, comme l'implique le procédé d'oscillation de la pression, alors que l'inertie de la colonne de liquide en oscillation permet un échange d'énergie entre les premier et le second espaces de travail.

(57) Pressure swing adsorption separation of a gas mixture is performed in first and second working spaces, with each working space having a flow path contacting adsorbent beds and variable displacement chambers. The volumes of the first and second working spaces are cyclically varied in opposite phase by oscillations of a liquid column whose movements change the volume of variable displacement chambers, so as to achieve cyclic pressure changes in each working space as required for the pressure swing process, while the inertia of the oscillating liquid column exchanges energy between the first and second working spaces.

2087973

1

ADSORPTIVE GAS SEPARATOR WITH INERTIAL ENERGY EXCHANGE

TECHNICAL FIELD

5   The invention relates to separations conducted by
pressure swing adsorption.

BACKGROUND ART

10   Gas separation by pressure swing adsorption is achieved
by coordinated pressure cycling and flow reversals over
an adsorbent bed which preferentially adsorbs a more
readily adsorbed component relative to a less readily
adsorbed component of the mixture. The total pressure is
15   elevated during intervals of flow in a first direction
through the adsorbent bed, and is reduced during
intervals of flow in the reverse direction. As the cycle
is repeated, the less readily adsorbed component is
concentrated in the first direction, while the more
20   readily adsorbed component is concentrated in the reverse
direction.

The conventional process for gas separation by pressure
swing adsorption uses two or more adsorbent beds in
25   parallel, with directional valving at each end of each
adsorbent bed to connect the beds in alternating sequence
to pressure sources and sinks, thus establishing the
changes of working pressure and flow direction. This
conventional pressure swing adsorption process also makes
30   inefficient use of applied energy, because of
irreversible expansion over the valves while switching
the adsorbent beds between higher and lower pressures.

The prior art also includes the following pressure swing
35   adsorption devices with cyclically operated volume
displacement means reciprocating at the same frequency at
both ends of an adsorbent bed, to generate pressure

2087973

2

changes internally and thus improve energy efficiency.

Keller (U.S. Pat. No. 4,354,859) has disclosed a single
bed pressure swing adsorption device for purifying both
5   components of a binary gas mixture fed to a central point
of the adsorbent bed. This device has reciprocating
volume displacement means which may be pistons or
diaphragms, of specified unequal displacement at opposite
ends of the bed.

10

My U.S. Pat. No. 4,702,903 also uses reciprocating volume
displacement means coupled to an adsorbent bed, with a
temperature gradient imposed on the adsorbent bed which
also serves as a thermal regenerator, so that heat may be
15   applied directly through a regenerative thermodynamic
cycle as an energy source to perform gas separations.

My U.S. Pat. No. 4,816,121, which is concerned with
separation of chemically reactive gases and vapours,
20   describes an embodiment in which a product or the
reaction is condensed as a liquid within the apparatus,
and this liquid fills a U tube interconnecting two
identical gas phase working spaces. A hydraulic energy
conversion means, such as a reversible pump-turbine,
25   controls reversing flow of liquid in the U tube,
associated with cyclic volume changes and pressure
changes in the two working spaces, in opposite phase.

My U.S. Pat. No. 4,968,329 discloses valve logic means to
30   provide large exchanges of fresh feed gas for depleted
feed gas, as may be required when concentrating one
component as without excessively concentrating or
accumulating other components such as water vapour which
may deactivate the adsorbent.

35

In U.S. Pat. No. 4,758,252, hydrostatic potential energy
is exchanged with adsorbent bed compression energy.

SUBSTITUTE SHEET

higher pressure of the cycle; and the amount of potential
energy thus stored is proportional to the size of the
working space and thus to the productivity of separated
products per cycle of the working space. Kinetic energy
5 storage in the present invention is provided in the
inertial mass and reciprocating velocities of components
associated with the cyclic volume displacement means. At
typical cycle frequencies of about 10 RPM, large inertial
masses or large reciprocating velocities of the kinetic
10 energy storage means (cooperating with the cyclic volume
displacement means) are necessary in order for the
kinetic energy storage to match the potential energy
storage, as required to achieve a low natural frequency
typically substantially equal to the cycle frequency.
15 For each working space, it is necessary to provide a
second potential energy storage means (such as a second
similar working space whose cycle is out of phase to the
working space) so that energy may be exchanged from
potential energy in the working space to kinetic energy
20 and then to potential energy in the second potential
energy storage means; and then back from the second
potential energy storage means to kinetic energy and then
to potential energy in the working space to complete the
cycle. Thus, a substantially constant amount of energy
25 is being stored within the apparatus, exchanging between
potential and kinetic energy. The energy exchange means
to exchange energy between potential and kinetic energy,
and also the kinetic energy storage means, are provided
in the drive mechanism of the cyclic volume displacement
30 means. Since potential energy must be alternatingly
provided as energy of compression and then removed as
energy of expansion in order to achieve cyclic pressure
changes, this invention provides a method and apparatus
to recover energy of expansion, to store that energy as
35 kinetic energy, and subsequently to use that energy as
energy of compression for the same or another working
space, so as to reduce the amount of driving energy

required to sustain operation of the process.

In preferred embodiments of the present invention, in
order to circumvent the difficulties and costs of scaling

5   up very low speed reciprocating machinery adapted for
cyclic storage of large amounts of kinetic energy,
oscillating liquid columns within elongated pipes are
used to provide cyclic volume displacements, to store
kinetic energy, and to exchange energy between working

10 spaces or between a working space and a second potential
enrgy storage means.

The oscillating liquid columns exchange compression
potential energy between adsorption working spaces (or

15 between an adsorption working space and an external
potential energy storage device such as a gas spring)
undergoing expansion and compression steps of pressure
swing cycles, while using the fluid mass of the liquid
columns to store kinetic energy in resonance with the

20 potential energy. The liquid columns are suitably
configured and elongated in order to store the necessary
large amount of kinetic energy. Thus, one adsorption
working space undergoing expansion expends its potential
energy of compression to accelerate a liquid column,

25 whose kinetic energy is then exchanged back to potential
energy. The apparatus of the present invention
oscillates at its resonant natural frequency, so that the
amount of potential energy stored when the adsorption
working pressure is maximized or minimized will be

30 substantially equal to the amount of kinetic energy
stored in the liquid column moving at its highest
velocity. Thus the driving energy required to drive the
process against work of gas separation, energy
dissipation and energy storage imbalances is minimized.

35

The invention further provides diaphragm or other
isolation means such as a piston float for preventing

direct contact between the liquid column and the gas
mixture undergoing separation, where such contact may
lead to adsorbent deactivation by vapour from the liquid.
Preferred embodiments of the present invention use
5   oscillating liquid columns to generate all of the volume
displacements required to achieve the pressure swings and
the coordinated cyclically reversing gas flow over the
adsorbent beds, while completely eliminating all
reciprocating machinery other than valves, the
10   oscillating liquid itself, and sealing elements such as
diaphragms.

Since the oscillating liquid column stores kinetic energy
in balance with the potential energy of compression,
15   highly efficient energy recovery is achieved between
adsorbent beds undergoing expansion and compressions
steps, particularly in larger scale systems where fluid
flow friction dissipation of the oscillating liquid
column can be minimized. Also, the oscillating liquid
20   columns change the working pressure within the adsorbent
beds so that valves may be opened to external pressure
sources and sinks with the pressure across the valve
already equalized to minimize valve operating stresses
and wear, thus avoiding a major problem of conventional
25   pressure swing adsorption processes where valves must
open across large pressure differences.

Furthermore, the complete or substantial avoidance of
high power reciprocating or pumping machinery, the
30   comparatively small adsorbent inventory, and the
relatively simplified valve logic of the present
invention will enable highly favourable capital costs,
particularly in larger scale tonnage applications.

35   The process of the invention may be described as a
process for separating first and second components of a
gas mixture, the first component being more readily

adsorbed under increase of pressure relative to the
second component which is less readily adsorbed under
increase of pressure over an adsorbent material, such
that a gas mixture of the first and second components

5   contacting the adsorbent material is relatively enriched
in the first component at a first lower pressure and is
relatively enriched in the second component at a second
higher pressure when the pressure is cycled between the
first and second pressures at a cyclic frequency;

10   providing for the process a flow path through an
adsorbent bed of the adsorbent material in a working
space; and the process having the cyclically repeated
steps at the cyclic frequency and in some sequence of:

15   (a)   introducing the gas mixture to the flow path,

       (b)   changing the volume of the working space, and thus
             generating cyclic pressure changes in the working
             space,

20

       (c)   generating cyclically reversing flow of the gas
             mixture in the flow path, while establishing a
             relative phase between the reversing flow and the
             said pressure changes,

25

       (d)   coordinating the relative phase of the said
             pressure changes within the working space and the
             reversing flow of the gas mixture in the flow path,
             so that the gas flow in the flow path is directed

30   toward a first end of the flow path when the
             pressure is approximately the first lower pressure,
             and the gas flow in the flow path is oppositely
             directed toward a second end of the flow path when
             the pressure is approximately the second higher

35   pressure; so as to achieve a separation of gas
             enriched in the first component to the first end of
             the flow path, and gas enriched in the second

8

component to the second end of the flow path,

(e) withdrawing the product from the flow path;

5 and the process is further characterized by the additional cyclic steps at the cyclic frequency of:

(f) storing potential energy in the working space when the pressure in the working space is the higher
10 second pressure, the said potential energy including energy of compression and adsorption associated with changing the pressure in the working space from the first pressure to the second pressure,

15 (g) storing kinetic energy when the pressure in the working space is changing between the first and second pressures, with the said kinetic energy at an intermediate pressure between the first and second pressures approximately equal to the
20 potential energy stored in the previous step (f),

(h) storing potential energy outside the working space when the pressure in the working space is
25 the lower first pressure, with the said potential energy approximately equal to the kinetic energy stored in step (f),

(i) providing driving energy to the process to
30 compensate for energy dissipation effects, and

(j) exchanging energy between the potential energy stored in step (f), the kinetic energy stored in step (g), and the potential energy stored in
35 step (h), in order to reduce the driving energy required.

The preferred embodiments of the invention generate
cyclically oscillating flow of a displacement liquid to
change the volume of the working space in step (b), and
storing the kinetic energy in step (g) substantially as
5   kinetic energy of the displacement liquid flowing to perform
step (b). If the ends of the liquid column are arranged to
oscillate vertically, some potential energy is also stored
in steps (f) and (h) as gravitational potential energy.

10   To perform the gas separation, the invention provides an
apparatus including:

(a)   a working space containing an adsorbent bed of
      the adsorbent material, a flow path through the
15   adsorbent bed having a first end of the flow path
      and a second end of the flow path, a first volume
      displacement chamber communicating with the first
      end of the flow path, and a second volume
      displacement chamber communicating with the second
20   end of the flow path,

(b)   cyclic volume displacement means to generate
      cyclic volume changes of the first and second volume
      displacement chambers, and to coordinate cyclic
25   volume changes of the first and second volume
      displacement chambers, at a cyclic frequency and
      with a relative phase so that volume changes in the
      first volume displacement chamber have a lagging
      phase with respect to volume changes in the second
30   volume displacement chamber, so as to cyclically
      change the pressure in the working space between the
      first pressure and the second pressure, and to
      generate cyclically reversing flow of the gas
      mixture in the flow path directed toward the first
35   end of the flow path when the pressure is
      approximately the first lower pressure and
      oppositely directed toward the second end of the

10

flow path when the pressure is approximately the
second higher pressure, and so as to achieve a
separation of gas enriched in the first component
toward the first end of the flow path, and gas
5   enriched in the second component toward the second
end of the flow path, and

(c)   means to introduce the gas mixture to the flow
path and to remove the product from the
10   flow path;

and the apparatus further characterized by including:

(d)   second potential energy storage means outside
15   the working space, to cyclically store potential
energy approximately equal to the potential energy
stored in the working space substantially as energy
of compression and adsorption when the pressure in
the working space is changed from the first pressure
20   to the second pressure,

(e)   kinetic energy storage means cooperating with
the cyclic volume displacement means, to cyclically
store kinetic energy approximately equal to the said
25   potential energy when the pressure is intermediate
between the first and second pressures,

(f)   energy exchange means to exchange energy
between the potential energy storage means and the
30   kinetic energy storage means, and between the the
kinetic energy storage means and energy of
compression and adsorption in the working space, and

(g)   means to provide driving energy to the process.
35

The driving energy for the process can be preferably
provided either by supplying the feed gas at an elevated

pressure relative to the delivery pressure of a product
or exhaust gas, or by supplying low grade heat to
maintain a temperature gradient in the gas working space
so that the apparatus is directly powered in part by a
5   regenerative heat engine cycle. Power may also be
provided by pumping the oscillating liquid columns
directly with reversible liquid pumps.

The energy storage means and the energy exchange means
10   are preferably provided as a liquid column in an
elongated pipe, with the liquid column having first and
second ends. The first end of the liquid column is
coupled to a volume displacement chamber of the working
space, so that movement of the liquid column in the pipe
15   is coupled to volume changes of the working space so as
to change the pressure of the working space, so that
potential energy of compression and adsorption stored in
the working space when the pressure is the second higher
pressure. The second end of the liquid column is coupled
20   to the second potential energy storage means, so that
movement of the liquid column stores potential energy in
the second potential energy storage means when the
pressure in the working space is the first lower
pressure. The means to provide driving energy maintains
25   oscillating displacements of the liquid column at the
cyclic frequency, and kinetic energy is stored
substantially in the moving fluid mass of the liquid
column when the pressure in the working space is changing
between the first and second pressures. Kinetic energy
30   may also be stored in auxiliary mechanical components,
such as a liquid pump with reversing direction of
rotation to control liquid column oscillation.

The means to couple one end of the liquid column to the
35   working space may be a flexible diaphragm or a floating
piston separating the liquid from the gas in a volume
displacement chamber, which may be configured as a

vertical cylinder. In some applications, the free
surface of the liquid may be in direct contact with the
gas in the first volume displacement chamber.

5   The second potential energy storage means may be another
working space similar to the working space but operated
in opposite phase, or may be a gas charged chamber
communicating to the pipe at the other end of the liquid
column from the working space. The second potential
10   energy storage means may be a vertical portion of the
liquid column at its second end, to store gravitational
potential energy.

   The liquid column may be a primary liquid column coupled
15   to the second volume displacement chamber; and the means
to coordinate cyclic volume changes of the first and
second volume displacement chambers (so that volume
changes in the first volume displacement chamber have a
lagging phase with respect to volume changes in the
20   second volume displacement chamber) is provided as a
secondary liquid column coupled at opposite ends to the
first and second volume displacement chambers, with the
lagging phase established by the fluid inertia of the
secondary liquid column.
25

   Alternatively the primary liquid column may be coupled to
the first volume displacement chamber; and the means to
coordinate cyclic volume changes of the first and second
volume displacement chambers (with the volume changes in
30   the first volume displacement chamber having a lagging
phase) is provided as a displacer piston means to
generate opposite volume displacements in the second
volume displacement chamber and in a displacer chamber
communicating to the first volume displacement chamber,
35   with displacer drive means to reciprocate the displacer
piston at the cyclic frequency.

The apparatus may include flow control means to control
oscillating flow of liquid in the liquid column,
such as a reversible pump or a throttle valve.   The
apparatus may alternatively have a shut-off valve in the
5 primarily liquid column pipe, with control means to close
the valve so as to stop flow in the pipe during intervals
while the pressure in the working space is the first
pressure and while the pressure in the working space is
the second pressure, so as to hold the stored potential
10 energy during such intervals and thus to extend the cycle
period beyond the resonant period of the liquid column in
the apparatus, and to open the valve to release the
stored potential energy for exchange with kinetic energy
of the liquid column while the pressure is changing
15 between the first and second pressures.

The apparatus may have multiple working spaces and liquid
columns interconnected for exchange of kinetic and
potential energy, and for smooth operation. Thus, an
20 apparatus may have three working spaces and three liquid
columns, each liquid column with a first end coupled to
the first volume displacement chamber of a working pace
and a second end coupled to the second volume
displacement chamber of another working space, and with
25 valve control means to control feed and product valved
timing such that the operating phase of the working
spaces is 120° apart.

Some devices of the present invention have a flow path
30 through a plurality of interconnected adsorbent beds
within the working space. The flow path may have two
ends, or may be branched to have three or more ends.
Cooperating and coordinated cyclic volume displacement
chambers are connected to some or all flow path ends, and
35 may be connected to a node in the flow path at the
interconnection between adjacent adsorbent bed segments.
The volume displacement chambers in each working space

all oscillate in volume at the same frequency, but with a
phase difference between at least two volume displacement
chambers at opposite ends of the flow path.

5   Product delivery valves and valve control means are
incorporated in the product delivery means, to control
the mass flow rates of the heavy and light products so
that desired high purity and recovery of the heavy and
light components in respectively the heavy and light
10   products is achieved.

The invention provides for energy balance between pairs
or triplets of gas separators operating in opposed phase.
A balance is achieved between potential and kinetic
15   energy storage by operating near the resonant natural
frequency of the apparatus. When two opposed working
spaces are used, both working spaces together store
potential energy which is maximum when their pressures
are oppositely extremized, and minimum when their
20   pressures are equal. Kinetic energy associated with
velocity of the primary liquid column will be
approximately maximum when the pressures are equal, and
minimum when the pressures are oppositely extremized.
Inertia contributing to kinetic energy storage may be
25   increased by using relatively long and small diameter
liquid column pipes. Hence, the apparatus will have a
resonant frequency at which energy storage is nearly
constant.

30   Over complete cycles, power will be generated by the
second volume displacement chambers, and power will be
absorbed by the first volume displacement chambers. If a
temperature gradient is maintained in the flow path such
that its second end is hotter than the first end,
35   excess power will be generated by the second piston
according to the Stirling thermodynamic cycle, and the
apparatus may then be powered thermally at least in part.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a simplified schematic of an apparatus with two
adsorbent beds and three volume displacement chambers in
5   each of two working spaces, coupled by an oscillating
liquid column.

Fig. 2 shows a similar apparatus with two volume
displacement chambers in each working space, and flow
10   control means in the liquid columns.

Fig. 3 shows pressure waveforms for a process according
to the invention.

15   Fig. 4 shows an oxygen concentration apparatus with
provision for partial powering by waste heat.

Fig. 5 shows an air separation apparatus capable of
purifying nitrogen and concentrating oxygen.
20

Fig. 6 shows an apparatus with two working spaces and
displacer pistons, and with a product component dissolved
or condensed into a liquid.

25   Fig. 7 shows an apparatus with three working spaces
coupled by three liquid columns in plan view.

Fig. 8 is an elevation view of one working space from
Fig. 7.

MODES FOR CARRYING OUT THE INVENTION

<u>Fig. 1</u>

5   A pressure swing adsorption apparatus 10 has a pressure housing 11, which includes an elongated pipe 12 containing a liquid column 14. Pressure housing 11 also contains a first gas working space 15, with a flow path 16 having a first end 17 and a second end 18. Flow path 16 extends from first end 17 through a first adsorbent bed 20 to an intermediate node 21, and thence through a second adsorbent bed 22 to second end 18. First end 17 of

10   the flow path communicates to a first product delivery valve 25, and to a first volume displacement chamber 26. Intermediate node 21 of the flow patch communicates to a feed supply valve 27 and to an intermediate volume displacement chamber 28. Second end 18 of the flow path communicates with a second product delivery valve 29, here shown as a non-return valve, and with a second volume displacement chamber 30. Feed

15   supply valve 27 communicates to feed conduit 31, and the first and second product delivery valves 25 and 29 communicate to product delivery conduits 32 and 33 respectively.

      Pressure housing 11 also includes a second gas working space 35, identical to the first gas

20   working space 15, with a flow path 36 having a first end 37 and a second end 38. Flow path 36 extends from first end 37 through a first adsorbent bed 40 to an intermediate node 41 of the flow path, and thence through adsorbent bed 42 to second end 38. First end 37 of the flow path 36 communicates to a first product delivery valve 45, and to a first volume displacement chamber 46. Intermediate node 41 of the flow path 37

25   communicates to a feed supply valve 47, and to an intermediate volume displacement chamber 48. Second end 48 of the flow path 36 communicates to a second product delivery valve 49, here shown as a non-

B

17

return valve, and to a second volume displacement chamber
50. Feed supply valve 47 communicates to feed conduit
51, and the first and second product delivery valves 45
and 49 communicate to product delivery conduits 52 and 53
5 respectively.

Each volume displacement chamber is coupled by a
diaphragm to one end of an oscillating liquid column,
which thus serves as a cyclic volume displacement means
10 for that chamber. The diaphragm serves as isolation
means to prevent direct contact of the liquid with the
gas in a gas working space, and to keep liquid out of the
adsorbent beds, while transmitting displacements of the
liquid into equal gas volume displacements in the volume
15 displacement chambers without substantial resistance.
The diaphragms may be flexing or rolling elastomeric
diaphragms.

Thus, liquid column 14 in pipe 12 has a first end 55
20 coupled by diaphragm 56 to the second volume displacement
chamber 30 of the first working space 15, and a second
end 57 coupled by diaphragm 58 to the second volume
displacement chamber 50 of the second working space 35.
Since liquid column 14 couples the first and second
25 working spaces, it will be referred to as the primary
liquid column. It is evident that flow in pipe 12 will
result in equal and opposite volume changes, and opposite
pressure changes, in the first working space 15 and the
second working space 35.
30

Each working space 15 and 35 operating under similar
conditions appears as a gas spring of equal stiffness and
coupled oppositely to primary liquid column 14.
Potential energy (including energy of compression and
35 adsorption) of the combined apparatus is maximized when
the working pressures of the two working spaces are
oppositely extremized, when the movement of liquid in

2087973

18

pipe 12 has reached an extreme position leftward or
rightward. Potential energy of the apparatus is
minimized when the the working pressures of the two
working spaces are equal and the liquid in pipe 12 is at
5   a centre position.

When the potential energy of the combined apparatus is
maximized, liquid flow in pipe 12 is approximately zero.
When the potential energy of the apparatus is minimized,
10 the liquid flow velocity in pipe 12 will be substantially
maximized. Kinetic energy associated with the liquid
flow in the primary liquid column 14 in pipe 12 is thus
maximized as the potential energy is minimized, while
that kinetic energy becomes zero as the potential energy
15 is maximized. Thus, the changes in kinetic energy tend
to cancel the changes in potential energy. Ideally, the
total energy associated with operation of the apparatus,
comprising the sum of potential and kinetic energy
contributions, will be maintained nearly constant through
20 cancellation of potential and kinetic energy variations,
thus achieving balance between energy stored
alternatingly in kinetic and potential energy forms.
When the amplitude of variations in kinetic and potential
energy are equal, the apparatus is operating at its
25 natural resonant frequency.

The kinetic energy associated with liquid flow is the sum
of the kinetic energies of all moving liquid particles,
i.e. the mass of the particle times the square of its
30 velocity and divided by 2. Thus, relatively small
volumes of liquid moving at high velocity can make a
large contribution to kinetic energy. Hence, smaller
diameters and longer length of pipe 12, commensurate with
good hydraulic design to avoid large flow friction
35 losses, will enhance the kinetic energy storage capacity.
Use of higher density liquid and operation at higher
cycle frequency will also enhance kinetic energy storage

within a compact overall volume. Desirable liquid properties include low viscosity and usually low vapour pressure.

Pipe 12, and other pipes in this and other embodiments, is a substantially rigid enclosure elongated in the direction of flow and enclosing a liquid column. The pipe need not have a round cross-section and need not be straight, although it is desirable that flow friction pressure drop losses be minimized. The pipe as defined herein may be provided as a conduit coiled within a larger vessel, or may be provided by compartments within a larger duct. In this specification, the definition of term "pipe" will encompass any substantially rigid geometry of a conduit confining a liquid column to flow between two ends of the conduit, with a velocity distribution of the liquid mass within the conduit or pipe so that kinetic energy may be usefully stored in that liquid flow.

Secondary liquid columns are provided in the embodiment of Fig. 1, to provide inertial coupling from the primary liquid column to the first and intermediate volume displacement chambers. Thus, a secondary liquid column 65 in pipe 66 communicates to with the first end 55 of the primary liquid column 14, and extends to the junction 67 coupled by diaphragm 68 to intermediate chamber 28. Another secondary liquid column 70 in pipe 71 extends from junction 67 (or first end 55) to liquid column end 72, coupled by diaphragm 73 to volume displacement chamber 26.

Similarly, a secondary liquid column 85 in pipe 86 communicates with the second end 57 of the primary liquid column 14, and extends to junction 87 coupled by diaphragm 88 to intermediate chamber 48. Another secondary liquid column 90 in pipe 91 extends from

5

10

15

20

25

A

junction 87 (or second end 57) to liquid column end 92,
coupled by diaphragm 93 to volume displacement chamber
46.

5   As shown by dashed upper position 95 and dashed lower
position 96 for diaphragm 58 changing the volume of a
typical volume displacement chamber 50, the maximum
amplitude of volume changes in each volume displacement
chamber is defined by the allowable deflection of the
10   diaphragms within the chambers. As the liquid rises and
falls below the diaphragm, the volume displacement
chamber above the diaphragm respectively contracts and
expands.

15   It will be noted that the diaphragms in Fig. 1 are shown
in positions that correspond to one position of a liquid
standing wave in the interconnected liquid columns.
Oscillations of the primary liquid column provide
opposite changes of total gas volume in the two working
20   spaces, while oscillations of the secondary liquid
columns provide phase shifts between the volume
displacement chambers in one working space. Thus,
oscillations of the primary liquid column provides means
to change the volume and thus to change the working
25   pressure in a working space, while exchanging potential
energy of compression in the working spaces with kinetic
energy of flowing liquid in the primary liquid column.
The working pressure in each working space will cycle
between lower and upper limits, defined as a first lower
30   pressure and a second higher pressure. The volume of the
working space has been maximized by expansion of its
volume displacement chambers (by falling liquid level
under the diaphragms) when the pressure drops to the
first pressure, and has been minimized by contraction of
35   its volume displacement chambers (by rising liquid level
under the diaphragms) when the pressure rises to the
second pressure.

Oscillations of the secondary liquid columns provides
means to generate cyclic reversing flow of gas in the
flow path, without changing the volume of a gas working
5   space.   Coordination of the liquid oscillations
in the primary and secondary liquid columns will provide
coordination of the relative phase of the changes of
pressure and the reversing flow of the gas mixture in the
flow path.   Since the gas pressure in the volume
10   displacement chambers of a working space is identical at
each instant, except for gas flow friction pressure drops
in the adsorbent beds, the inertia of the secondary
liquid columns will cause the volume displacements in the
intermediate volume displacement chamber 28 and (even
15   more) the first volume displacement chamber 26 to have a
lagging phase relative to volume changes in the second
volume displacement chamber 30 of working space 15.

For the system to oscillate at its natural or resonant
20   frequency, the kinetic energy of the primary liquid
column at its maximum velocity will be equal to the total
compression potential energy of the working spaces, plus
gravitational potential energy associated with liquid
level differences between the working spaces, when liquid
25   column is stopped and the pressures in the working spaces
are extremized at the first and second pressures.   The
cyclic frequency of the process will conform closely to
the resonant frequency of the primary liquid column in
the apparatus, and may be close to the free natural
30   frequency of the secondary liquid columns, whose free
natural frequency is defined by the kinetic energy of a
secondary liquid column at maximum velocity being equal
to the gravitational potential energy associated with
maximum liquid level differences between its ends.
35

Consequently, the gas flow in the flow path 16 will be
directed toward the first end 17 when the pressure is the

first lower pressure, since then the first chamber 26 is
still expanding while the second chamber 30 has expanded
fully and is contracting. When the pressure is the
second higher pressure, the gas flow in flow path 16 will
5   be directed toward the second end 18, since then the
first chamber 26 is still contracting while the second
chamber 30 has contracted fully and is expanding.

With a gas mixture of first and second components, the
10 first component being more readily adsorbed under
increase of pressure relative to the second component
which is less readily adsorbed under increase of
pressure, contacting the adsorbent along the flow path,
the gas flow directed toward the second end 18 of the
15 flow path when the pressure is the second pressure will
be enriched in the second component, since the first
component is then taken up preferentially by the
adsorbent at the higher pressure. When the pressure is
the first pressure, the gas flow directed toward the the
20 first end 17 of the flow path will be enriched in the
first component which is desorbed at the lower pressure.
Consequently, over each cycle, the first component is
concentrated toward the first end 17 of the flow path,
and the second component is concentrated toward the
25 second end 18 of the flow path.

With the primary liquid column 14 oscillating back and
forth with a suitable amplitude to generate cyclic
variations of the total volume of each working space, the
30 pressure in each working space will cycle between the
first pressure and the second pressure. When the working
pressure in working space 15 reaches approximately the
second pressure, its feed supply valve 27 is opened by
valve control means 98 for a time interval, during which
35 the feed gas mixture supplied at approximately the second
pressure enters the working space and maintains the
working pressure substantially at the second pressure

while the feed supply valve remains open. Also while the
working pressure is substantially the second pressure,
second product delivery valve 29 opens to deliver some
first product gas into delivery conduit 33.

After feed supply valve 27 is closed by control means 98,
the working pressure in working space 15 drops to the
first pressure because of the expansion of the its volume
displacement chambers. When the working pressure reaches
approximately the first pressure, valve control means 98
opens first product delivery valve 25 for an interval
during which the first product is delivered thorugh
conduit 32, and the working pressure is maintained at
approximately the first pressure. Then control means 98
closes valve 25, and the working pressure rises to the
second pressure as the working volume is contracted by
the volume displacement chambers.

An identical cycle, but 180° out of phase, will be
conducted in the second working space 35. When the
working pressure there is the second pressure, feed will
be introduced through feed supply valve 47, and second
product will be withdrawn through second product delivery
valve 49. When the working pressure is the first
pressure, first product will be withdrawn through first
product delivery valve 45. The opening and closing of
feed supply valve 47 and first product delivery valve 45
are timed by valve control means 99.

For the above cycle to operate as described, the internal
pressure of the feed conduits 31 and 51 will be
maintained (for example by an external compressor) at or
slightly above approximately the second pressure. The
internal pressure of second product delivery conduits 33
and 53 will be externally maintained at or slightly below
approximately the second pressure, and the internal
pressure of first product delivery conduits 32 and 52

will be externally maintained at approximately the first
pressure.

During steady state operation, the amount of first
product withdrawn during each cycle is less than the
amount of feed introduced, by the amount of second
product withdrawn. Since the second pressure is the
higher pressure, driving energy is supplied to the
apparatus by the admission of pressurized feed gas less
the amount of second product withdrawn at the second
pressure, and by the delivery of the amount of first
product withdrawn at the first pressure. Thus, the
apparatus as described operates as an expansion engine,
and the energy thus provided during each cycle excites
the oscillation of the liquid columns and overcomes
energy dissipation losses so that steady oscillation is
sustained.

In the embodiment of Figure 1, energy to drive the
apparatus is provided by introducing the feed gas mixture
at a relatively higher pressure, and withdrawing a
product gas at a relatively lower pressure, thus
contributing expansion energy within the working space to
overcome energy dissipation effects and any imbalance
between kinetic and potential energy stored in the
apparatus at alternating moments. The apparatus is
controlled by valve control means 98 and 99, adjusting
the intervals during which the feed supply valves and
first product delivery valves are open. The first and
second pressures may also be adjusted.

Each working space of the apparatus includes a plurality
of volume displacement chambers communicating with the
ends of the flow path and with intermediate nodes of the
flow path. The volumes of these chambers are cyclically
changed at the same cyclic frequency, and coordinated to
establish a phase relation between the chambers along the

flow path. The phase of volume changes in intermediate
volume displacement chamber 28 is intermediate between
that of first volume displacement chamber 26 with a
lagging phase, and second volume displacement chamber 30
5   with a leading phase. Additional adsorbent beds and
volume displacement chambers may be incorporated in the
flow path, which may be double-ended or may be branched.

Example No. 1

10

A small experimental apparatus using pistons instead of
liquid columns, but with the same configuration of
adsorbent beds and valve logic as either working space of
Fig. 1, was used to purify hydrogen as the desired second
15   product from a feed gas mixture of 74% H_2, 24.4% CO_2, 1%
CO and 0.5% CH_4, representing dry methanol reformate.
Swept volume of each volume displacment chamber was
approximately 200 cc, and the feed gas flow rate was
approximately 250 cc/min. Cycle frequency was 10 RPM.
20   Activated charcoal adsorbent was used.   By controlling
the ratio of first and second product flows, the second
product was purified hydrogen of >99.9% purity, with
98.7% recovery of feed hydrogen in the second product.

25

Fig. 2

Modifying the arrangement of Fig. 1, the intermediate
volume displacement chambers may be deleted, as shown in
30   Fig. 2. This embodiment 100 is also capable of
substantially complete separation of binary mixtures with
both components present at substantial concentrations in
the feed. Component nomenclature and numerals in Fig. 2
follow Fig. 1 exactly, after deletion of intermediate
35   volume displacement chambers 28 and 48, and the
integration of secondary liquid columns 65 and 85 with
columns 70 and 90 respectively, and pipes 66 and 86 with

pipes 71 and 91 respectively.

Referring to the first working space 15 of embodiment 100, the first adsorbent bed 20 could be deleted, so that intermediate node 21 would become identical with the first end 17 of flow path 16. The apparatus would then be suitable for purifying the second (less strongly adsorbed) component of the feed mixture, with incomplete recovery of the second component since the first product would be only partially concentrated in the first component.

Alternatively, the second adsorbent bed 22 could be deleted, so that intermediate node 21 would become identical with the second end 18 of flow path 16. The apparatus would then be suitable for purifying the first (more strongly adsorbed) component of the feed mixture, with incomplete recovery of the first component since the second product would be only partially concentrated in the second component.

Fig. 2 also shows provision for additional control means, so that oscillations of the primary and secondary liquid columns may be controlled more positively. These control means include primary flow control means 101 in the primary liquid column 14, and secondary flow control means 102 and 103 in secondary liquid columns 70 and 90 respectively. The primary and secondary flow control means may be control valves, or alternatively may be flow control pump means. Flow control pumps may be reversible controllable pitch propeller pumps, or fixed pitch controllable speed and reversing propellers (which would provide some supplemental kinetic energy storage in rotating parts). If the liquid is electrically conductive (either an electrolyte or a liquid metal), electromagnetic pumps (e.g. using the linear induction motor principle) may be highly suitable as inherently

reversible flow control pumps to serve as primary flow
control means 101 or secondary flow control means 102 and
103. Flow control means 101, or 102 and 103, provided as
pump means may be actively controlled by a feedback
5   controller 105, responding to primary flow sensor 106 and
secondary flow sensors 107 and 108. Feedback controller
105 will be programmed to establish and maintain the
primary and secondary liquid oscillations within a pre-
determined optimal pattern of amplitudes and phases,
10   further coordinated with valve controllers 98 and 99.

While flow control means provided as throttling control
valves may be used passively to adjust the oscillation
damping coefficient to maintain desired amplitudes, flow
15   control means provided as valves may be used actively.
Thus, a primary or secondary flow control means provided
as a two-way shut-off valve may be closed at the moment
when liquid flow through it stops, held closed for a
desired delay interval, and then opened to release the
20   exchange of potential energy for kinetic energy. The
potential energy stored in the apparatus is typically
maximized when the liquid flow stops, and can be held by
closing a valve to stop flow over the delay interval.
This approach of interrupting the oscillations extends
25   the cycle period by the amount of the delay intervals,
while still allowing the exchange of potential and
kinetic energy to enable fullest energy recovery. A
longer cycle period may be necessitated by slow
adsorption kinetics; and the approach of interrupting
30   oscillations with a liquid flow shut-off valve serving as
primary liquid flow control means enables energy
exchange, while avoiding use of an excessively long and
massive liquid column that would be needed to establish a
very long natural resonant period.
35

Fig. 3

In order to clarify the operation of the apparatus, Fig.
3 is a graph of pressure versus time. The vertical axis
5   115 represents total working presure within e.g. working
space 15 of apparatus 10 of Fig. 1 or 100 of Fig. 2, and
the horizontal axis 116 represents time. For N moles of
gas, at an approximately constant absolute temperature T,
within working space 15, and in the approximation of a
10   linear dependence of adsorption uptake on total pressure
P, one has the approximation of the ideal gas law,

$$P \; V \; = \; N \; R \; T,$$

15   where V represents the effective gas volume including the
free gas volume of the working space plus an allowance
for adsorbent uptake. As the free gas volume varies
approximately sinusoidally between upper and lower limits
as the primary liquid column 14 oscillates, the pressure
20   also varies quasi-sinusoidally, as shown in Fig. 3 in
curve 120 for $N = N_1$ moles of gas in the working space,
and in curve 121 for $N = N_2$ moles of gas in the working
space, where $N_2 > N_1$.

25   The process is described, starting with N_2 moles of gas
in the working space, and with the pressure dropping just
before time 130. At time 130, the working space pressure
reaches its minimum value at the first pressure P_1, and
the first product delivery valve 25 is opened by
30   controller 98. Valve 25 stays open during an interval
until time 131, and $(N_2 - N_1)$ moles of first product is
delivered through valve 25 as the pressure remains
substantially equal to P_1. At time 131, controller 98
closes the first product delivery valve 25, and the
35   pressure of the N_1 moles of gas rises to the maximum
value which is the second pressure P_2 attained at time
132. At time 132, controller 98 opens the feed supply

valve 27, which is held open during an interval until time 133. During the interval between times 132 and 133, the feed supply means delivers feed gas mixture into the working space, and a portion leaves the working space as
5 second product through the second product delivery valve 29, so that $(N_2 - N_1)$ excess moles are retained in the working space. With N_2 moles of gas in the working space, the feed supply valve closes at time 133, and the pressure drops to its minimum value P_1 at time 134, which
10 is one cycle period after time 130. The cycle then repeats.

Sine there are more moles of gas in the working space during an expansion step from time 133 to time 134,
15 compared to the number of moles during a compression step from time 131 to time 132, the apparatus is powered by the excess compression energy of its feed supply. Clearly, the valve logic described above could be modified in many ways, within the principle of
20 introducing the feed gas mixture at a relatively higher pressure compared to the pressure at which a product gas is withdrawn.

Fig. 3 is also suggestive of another way to power an
25 apparatus of the present invention. If curves 120 and 121 are taken to represent the same number N of moles of gas in the working space, but at different temperatures T_1 for curve 120 and T_2 for curve 121, where $T_2 > T_1$, we may regard the time interval from time 130 to time 131 as
30 a step during which the average temperature of the gas in the working space is decreased, and the interval from time 132 to time 133 as a step during which the average temperature of the gas in the working space is increased. These steps are obtained if the second end of the flow
35 path and gas within the second volume displacement chamber are maintained at a higher temperature than the first end of the flow path and gas within the first

volume displacement chamber, since the gas in the flow
path flows toward the hotter second end of the flow path
when the pressure is the higher second pressure, and
toward the cooler first end of the flow path when the
5 pressure is the lower first pressure. This is the
principle of the Stirling cycle, and the ideal expansion
energy available from expanding the hotter gas at T_2
between time 133 and time 134 exceeds the ideal
compression energy required to compress the cooler gas at
10 T_1 between time 131 and 132. Hence, thermal energy can
be converted by a modified Stirling cycle to drive the
apparatus, as will be further described in the
embodiments of Figs. 4 and 7.

15 Fig. 4

An oxygen concentration apparatus, with provision for
supplemental thermal powering by a low grade heat source,
is described. Air separation apparatus 200 has an inlet
20 filter 201 filtering feed air to a feed blower 202,
driven by motor 203. The compressed feed air from feed
blower 202 enters feed manifold 204, with surge chamber
205. The feed manifold may also include a chiller and
water condensate trap. Feed manifold 204 is connected to
25 a first working space 210 by first feed supply valve 211,
and to a second working space 212 by second feed supply
valve 213.

In first working space 210, the feed supply valve 211
30 communicates to a first end 220 of a flow path through
adsorbent bed 221. The flow path passes from its first
end 220 through bed 221 and thence through heat exchanger
222 to second end 223 of the flow path. Second end of
the flow path 223 communicates to a product delivery
35 valve 225, and to a second volume displacement chamber
228 whose volume is changed by a floating hollow piston
230, sealed by diaphragm 231 to second cylinder 232. The

second end 223 of the flow path, heat exchanger 222,
second cylinder 232, and the adjacent end of the
adsorbent bed 221 are enclosed in a thermal insulation
jacket 235. The first end 220 of the flow path is
5 connected by non-return valve 240 to a first volume
displacement chamber 242, from which exhaust gas is
discharged to ambient by exhaust non-return valve 244.
Volume changes in the first volume displacement chamber
242 are achieved by a secondary oscillating water column
10 245 in displacement vessel 246.

In second working space 212, the feed supply valve 213
communicates to a first end 250 of a flow path through
adsorbent bed 251. The flow path passes from its first
15 end 250 through bed 251 and thence through heat exchanger
252 to second end 253 of the flow path. Second end of
the flow path 253 communicates to a product delivery
valve 255, and to a second volume displacement chamber
258 whose volume is changed by a floating hollow piston
20 260, sealed by diaphragm 261 to second cylinder 262. The
second end 253 of the flow path, heat exchanger 252,
second cylinder 262, and the adjacent end of the
adsorbent bed 251 are enclosed in a thermal insulation
jacket 265. The first end 250 of the flow path is
25 connected by non-return valve 270 to a first volume
displacement chamber 272, from which exhaust gas is
discharged to ambient by exhaust non-return valve 274.
Volume changes in the first volume displacement chamber
272 are achieved by a secondary oscillating water column
30 275 in displacement vessel 276.

The apparatus 200 has a primary water column 280
oscillating in a pipe 281, whose first end 282
communicates directly to second cylinder 232 and to pipe
35 283 containing secondary oscillating water column 245. A
second end 292 of pipe 282 communicates directly to
second cylinder 262 and to pipe 293 containing secondary

2087973

32

oscillating water column 245.

Using a molecular sieve adsorbent such as zeolite 10X, the apparatus will deliver concentrated oxygen as the
5 first product. Product delivery valves 225 and 255 deliver the product oxygen into a product manifold 295, from which the product oxygen is delivered by product compressor 296 powered by motor 297. Nitrogen, carbon dioxide and water vapour are concentrated in the second
10 product which is exhausted by exhaust valves 244 and 274. The role of non-return valves 240 and 270 is to ensure positive removal of oxygen-depleted feed gas exiting from the second end of the flow path during each cycle, so that atmospheric humidity will not be excessively
15 concentrated and accumulated at the second end of the flow path; and only fresh feed air is admitted to the adsorbent bed. Since gas in the first volume displacement chambers 242 and 272 cannot reenter the adsorbent bed, but will be exhausted by non-return valves
20 244 and 274, the free surface of the water can be allowed to contact the gas in chambers 242 and 272 without a separating diaphragm.

If the heat exchangers and thermal insulation jackets are
25 omitted, and shutoff valves are substituted for non-return valves 240 and 270 so that the delivery pressure of feed blower 202 may be increased sufficiently above ambient pressure, the apparatus may be powered solely by the feed blower motor 203. If in the apparatus as
30 described above the first ends of the flow paths are maintained at a temperature greater than ambient (i.e., of the order of 80° to 120°C) by heat exchangers 222 and 252, the process can be thermally powered by relatively low grade heat through a modified Stirling cycle. In
35 this case, the floating pistons 230 and 260 would be hollow structures with substantially the shape shown in order to insulate the second spaces from the water below

SUBSTITUTE SHEET

diaphragms 231 and 261.

A difficulty with operation of nitrogen selective
adsorbent beds for oxygen enrichment at greater than
5 ambient temperature is the fact that both the nitrogen
capacity and the nitrogen/oxygen selectivity of the
zeolites are reduced at higher temperatures. For a given
zeolite adsorbent, working in a given pressure range,
there will be an optimum temperature for the best working
10 capacity in adsorption and desorption of nitrogen under
change of pressure. At much higher than optimum
temperature, nitrogen uptake is too low; and at much
lower than optimum temperature, the adsorbent is nearly
saturated in nitrogen. For adsorption following an ideal
15 Langmuir isotherm, which fits fairly well to nitrogen
adsorption on common zeolite adsorbents, the desirable
greatest change of nitrogen loading for small pressure
changes is obtained under conditions corresponding to 50%
of adsorption saturation. The Langmuir isotherm is
20 expressed as

$$q / q_s = [b(T) \, p] / [1 + b(T) \, p]$$

for q adsorbed nitrogen concentration as a ratio of the
25 saturated level q_s, driven by nitrogen partial pressure
p, and with the parameter $b(T)$ exponentially declining
with higher temperature with an exponent proportional to
the heat of adsorption and inversely proportional to the
absolute temperature. The adsorption equilibrium
30 coefficient (partial derivative of q with respect to p at
constant T) is maximized by selecting p and T so that
$\{b(T) \, p\} = 1$. Satisfactory operation will be obtained
over a reasonably wide range of the Langmuir isotherm on
either side of this midpoint.
35

For typical samples of zeolite 10X, $b = 2.2$ atm^{-1} at 30°C.

34

Hence, air separation performance with zeolite 10X near ambient pressure and at ambient or slightly elevated temperature is expected and observed to be satisfactory. At moderately higher temperatures, it would be desirable

5   to raise the total working pressure to compensate the temperature effect with zeolite 10X.

A novel approach to obtain satisfactory performance of a zeolite air separation bed at higher temperatures is to

10 use a much more strongly nitrogen-selective zeolite, which adsorbs nitrogen so strongly as to be nearly nitrogen saturated in contact with dry air at ambient temperatures, but will be of the rough order of 50% saturated at the higher working temperature. Coe et al

15 in U.S. Patent No. 4,732,584 disclose the effective use of chabazite exchanged with divalent metal cations, particularly calcium or strontium, for removing trace levels of nitrogen from argon. Coe et al point out that these adsorbents adsorb nitrogen too strongly to be of

20 practicable use for bulk air separation.

I have fitted calcium exchanged chabazite isotherm data presented by Coe et al to Langmuir isotherms, estimating values of b for nitrogen up to $b = 45$ atm^{-1} at 30°C,

25 confirming that such adsorbents could only be effective at very low partial pressures of nitrogen at ambient temperature. Using values for the latent heat of adsorption provided by Coe et al, I estimate that the same calcium exchanged chabazite would have $b = 1$ atm^{-1} at

30 about 109°C, thus reaching the unexpected result that this and similar adsorbents will be highly suitable in the present invention when applied to thermally powered air separation and used in the higher temperature zone of the adsorbent bed. Consequently, chabazite exchanged

35 with a divalent metal cation such as calcium or strontium is a preferred adsorbent for the portions of adsorbent beds 221 and 251 adjacent to heat exchangers 222 and 252

(and second flow path ends 223 and 253) respectively, when these adsorbent bed zones are heated to temperatures in the range of about 80°C to 120°C.

5   In operation of apparatus 200, the second pressure is defined by the feed compressor 202. Product oxygen will be delivered to product manifold 295 at that pressure, less frictional pressure drops in conduits, the adsorbent bed flow path, and valves 211 and 225. Exhaust oxygen

10   depleted air is delivered at ambient pressure. However, the first pressure of the cycle may be considerably sub-ambient, as this system operates in a vacuum pressure swing cycle. The inertia of the primary liquid column 280 serves to carry the system through the vacuum swing

15   in each working space alternatingly. Operation of the process may be controlled completely by the timing of feed supply valves 211 and 213.

Fig. 5

20

Apparatus 300 is shown with a single working space 305, coupled to the first end 309 of a primary liquid column 310 in pipe 311. The second end 312 of liquid column 310 is in a vertical portion 314 of pipe 311. The second end

25   312 of the liquid column may terminate in a free surface, or may be isolated from gas contact by a flexible diaphragm. With a cross-sectional area A of pipe portion 314 at the surface of the liquid column at its second end, gravitational potential energy is stored in the

30   amount

$$\rho \, g \, A \, \Delta z$$

for liquid density ρ and an upward vertical movement Δz

35   of the liquid column second end 312.

The top end 315 of pipe portion 314 may be either open or closed to the atmosphere. A valve 316 is shown to indicate the option of the space being closed with a defined quantity of gas therein, and valve 316 is then
5 closed so that chamber 318 in the top end 315 of pipe portion 314 acts as a gas spring. Assuming that the chamber 318 contains N moles of gas in an initial volume V_o with valve 316 closed, and in the approximation of isothermal gas compression, the compression potential
10 energy associated with an upward vertical movement Δz of the liquid column second end 312 is

$$N \; R \; T \; \log_e \{V_o / [V_o - A \Delta z]\}$$

15 Similar expressions apply to changes of gravitational and compression potential energy for the working space 305, with V_o defined to be the free gas volume of the working space plus an allowance for adsorbent uptake, and a summation for gravitational potential energy in different
20 volume displacement chambers of the working space. The mean gas volumes, mean working pressures, and liquid surface areas A of the working space 305 and the chamber 318 will be adjusted so that the potential energy stored in the working space at the higher second pressure is
25 approximately equal to the potential energy stored at the second end 312 of the primary liquid column 310 when the pressure in the working space is the lower first pressure.

30 The kinetic energy stored in the primary liquid column 310 of area A and length L, with liquid velocity v, is

$$1/2 \; \rho \; A \; L \; v^2$$

35 Under the desirable condition of operation at the resonant natural frequency, the kinetic energy carried in the liquid column at maximum liquid flow velocity will be

approximately equal to the potential energy stored when the working pressure in the working space is either the first or second pressure. By matching the liquid displacements and velocity (within approximately

5 sinusoidal liquid oscillations) under the condition of continuity for incompressible liquid, the natural frequency and consistent design parameters are established. For a cycle frequency of 10 RPM, first pressure of 1 atm and second pressure of 2 atm, with

10 water as the displacement liquid, and with liquid velocity amplitude limited to 5 m/s to avoid excessive flow frictional losses, the required primary liquid column length is approximately 30 m.

15 The above discussion shows how a single working space of the invention may be operated at the first end of a primary liquid column, with potential energy stored at the second end of the liquid column. This approach may be applied to many working space configurations, such as

20 described for example with respect to Figs. 1 and 2. A particular configuration of the working space will now be described for an air separation process, which has the capability to deliver high concentration nitrogen as well as oxygen. This process could also be conducted with two

25 working spaces, coupled to opposite ends of a primary liquid column as shown in Fig. 1.

Working space 305 has three flow path ends branching from an intermediate node 320. One flow path branch passes

30 from node 320 through first adsorbent bed 325 to first flow path end 326, which is connected by feed supply valve 328 to feed supply compressor 330, and by non-return valve 332 to a first volume displacement chamber 334. First volume displacement chamber 332 also

35 communicates to an exhaust non-return valve 336. A second flow path branch passes from node 320 through intermediate adsorbent bed 340 to intermediate flow path

end 342, which communicates to an intermediate volume
displacement chamber 344 and to a first product delivery
valve 346. A third flow path branch passes from node 320
through second adsorbent bed 350 and thence through

5   conduit 351 to second flow path end 352, which
communicates by conduit 353 to a second volume
displacement chamber 354, and to a second product
delivery non-return valve 356. The swept volumes of the
volume displacement chambers 334, 344 and 354 may be

10   approximately equal.

The second volume displacement chamber 354 is coupled in
cylinder 359 to the first end 309 of primary liquid
column 310 by diaphragm 360, whose geometry is defined by

15   piston float 361. The intermediate volume displacement
chamber 344 is coupled by diaphragm 363 with piston float
364 to the end 365 of a first secondary liquid column 366
in pipe 367 extending from the first end 309 of primary
liquid column 310.

20

Since the first volume displacement chamber 334 is
isolated from the working space by non-return valve 332
which prevents back flow into adsorbent bed 325, no
diaphragm is necessary to separate gas in chamber 334

25   from liquid. Hence first volume displacement chamber 334
is coupled by liquid free surface 375 to the end 378 of a
second secondary liquid column 380 in pipe 381
communicating to first end 309 of the primary liquid
column 310. Liquid column 380 may be coupled directly to

30   first end 309 of primary liquid column 310, rather than
indirectly through liquid column 366 as shown, so that
the phase of volume changes in chambers 334 and 344 may
be similar. The phase of volume changes in both chambers
334 and 344 will lag the phase of volume changes in

35   chamber 354.

39

Feed air is introduced to working space 305 through feed
supply valve 328 when the working pressure is elevated
above ambient. First adsorbent bed 325 serves as a
dessicant dryer bed, so that gas reaching the node 320 is
5   dry. Water vapour trapped at elevated pressure in bed
325 is released to gas flowing toward the first flow path
end and through non-return valve 332 into first chamber
334 at low pressure, and is expelled with a fraction of
exhaust air from valve 336. The apparatus is adjusted so
10   that gas in adsorbent bed 340 also flows toward the
intermediate flow path end 342 at the lower first
pressure, so that adsorbent bed 340 (of nitrogen
selective zeolite such as 10X) serves to concentrate
nitrogen, which is delivered preferably at approximately
15   ambient pressure (the first pressure) when valve 346 is
opened. Gas in adsorbent bed 350 (also charged with
nitrogen selective zeolite) flows toward second flow path
end 352 when the pressure is the higher second pressure,
so that concentrated oxygen is withdrawn through valve
20   356.

This apparatus is capable of delivering high purity
nitrogen, or 95% purity oxygen (with argon impurity), or
both simultaneously, starting from humid ambient air.
25   Energy to power the process is provided as compression
energy of feed air, since air exhausted from valve 336
and the product nitrogen from valve 346 are withdrawn at
lower pressure. Optionally, a heat exchanger may be
provided in conduit 351 to maintain the second end of the
30   flow path at a relatively elevated temperature, so that
the process is in part thermally powered by low grade
heat. In that case, a thermal insulation jacket and a
modified piston float for the second volume displacement
chamber would be provided as described for Fig.4, so as
35   to minimize heat leakage losses.

Fig. 6

The above described embodiments have used secondary
oscillating liquid columns to establish the necessary
5   phase differences between volume displacement chambers
of a single working space, whose total volume changes and
consequent pressure changes are established by a
resonantly oscillating primary liquid column. Embodiment
500 of the invention shows use of a reciprocating
10   displacer piston, separate from the oscillating liquid
column which establishes pressure changes in the working
space, to establish phase differences between volume
displacement chambers of a working space and thus to
establish flow in the flow path through the adsorbent
15   bed.

Apparatus 500 includes a first working space 501 and a
second working space 502, which operate 180° out of
phase. The first working space 501 includes an adsorbent
20   bed 505 with a first end 506 and a second end 507, the
adsorbent bed providing a flow path between its first and
second ends. The second end 507 of the adsorbent bed
communicates through an optional heat exchanger 508 to a
second volume displacement chamber 510 and a second
25   product delivery valve 512. The first end 506 of the
adsorbent bed communicates to a liquid displacement
chamber 515, in turn communicating by conduit 516 to
displacer chamber 520. The combined volumes of chambers
515 and 520 is effectively a first volume displacement
30   chamber for the first working space. The second volume
displacement chamber 510 and displacer chamber 520 are in
opposite ends of a displacer cylinder 521, and are
separated by a displacer piston 522 reciprocating in
cylinder 521 and sealed therefrom by piston seal 523.
35   The displacer piston 522 is reciprocated by displacer
drive means, here shown as a piston rod 526 attached to
displacer piston 521 and extending from displacer chamber

520 through rod seal 526 to a linear actuator 528. The
volume of liquid displacement chamber 510 is changed by
liquid rising and falling in cylinder 530, this liquid
being the first end 531 of primary oscillating liquid
5   column 532 in pipe 533 extending from cylinder 530.

The second working space 502 includes an adsorbent bed
535 with a first end 536 and a second end 537, the
adsorbent bed providing a flow path between its first and
10   second ends. The second end 537 of the adsorbent bed
communicates through an optional heat exchanger 538 to a
second volume displacement chamber 540 and a second
product delivery valve 542. The first end 536 of the
adsorbent bed communicates to a liquid displacement
15   chamber 545, in turn communicating by conduit 546 to
displacer chamber 550. The combined volumes of chambers
545 and 550 is effectively a first volume displacement
chamber for the second working space. The second volume
displacement chamber 540 and displacer chamber 551 are in
20   opposite ends of a displacer cylinder 551, and are
separated by a displacer piston 552 reciprocating in
cylinder 551 and sealed therefrom by piston seal 553.
The displacer piston 552 is reciprocated by displacer
drive means, here shown as an extension of piston rod 525
25   attached to displacer piston 552 and extending from
displacer chamber 550 through rod seal 556 to the linear
actuator 528 driving both displacer pistons 521 and 551.
The volume of liquid displacement chamber 545 is changed
by liquid rising and falling in cylinder 560, this liquid
30   being the second end 561 of primary oscillating liquid
column 532 in pipe 533 extending from cylinder 530 to
cylinder 560.

The pressure difference across each of displacer pistons
35   522 and 552 is small, being just the frictional pressure
drop in each adsorbent bed flow path. Hence, the power
required of displacer drive means 528 is small, and may

2087973

be zero since the pressure difference between the first
working space 501 and the second working space 502 acting
on the cross sectional area of piston rod 525 is in the
correct sense to drive the displacer pistons to generate
5 flow in each flow path toward the first end when the
pressure is the first pressure, and toward the second end
when the pressure is the second pressure. When the
pressure is high in the first working space because the
liquid level is high in cylinder 530, and the pressure is
10 then low in the second working space with the liquid
level low in cylinder 560, displacer piston 522 moves to
expand chamber 510 while displacer piston 552 contracts
chamber 540. Displacer actuator 528 may then be
eliminated, or retained as a phasing control mechanism.
15 If optional heat exchangers 508 and 538 are provided, and
are used to heat the second chambers 510 and 540 and the
second ends 507 and 537 of the adsorbent beds, a cooling
jacket 565 may be provided to cool pipe 533, with cooling
water or air provided by conduit 566 and removed by
20 conduit 567.

A shut-off valve 570 in pipe 533 may be used to stop the
movement of liquid column 532 at the extremes of its
oscillation, so that the interval of maximum (second)
25 pressure in one working space and minimum (first)
pressure in the other working space may be extended as
long as shut-off valve 570 is held closed. Closure of
valve 570 is effected by rotating ball 571 90° in valve
housing 572, from the fully open position shown. While
30 valve 570 is closed, potential energy is stored in the
apparatus as compression energy and gravitational energy
due to the higher elevation of liquid in one working
space. When valve 570 is rapidly opened from its closed
position to its fully open position, the potential energy
35 stored in one working space is released to accelerate the
liquid column 523 which then stores potential energy in
the other working space. Thus, the potential energy

stored in one working space is exchanged to kinetic
energy of the liquid column and then to potential energy
in the otehr working space. The liquid column is then
allowed to oscillate one half cycle at a time, taking one
5 half its resonant period to achieve the potential energy
transfer from one working space to the other. The use of
inertia in the liquid column to store kinetic energy
enables substantially complete exchange of potential
enrgy between the working spaces, so that expansion
10 energy normally dissipated in pressure swing adsorption
gas separation processes is here recovered to a high
degree. The use of shut-off valve 570 is only justified
when the process cycle period must be extended beyond the
natural resonant period of the liquid column between the
15 working spaces.

With the addition of feed supply means and a second
product removal means, embodiment 500 as described above
may be applied to diverse gas separation applications.
20 In further generalizations, multiple adsorbent beds may
be provided in the flow path of each working space, as
described for Fig. 1 above. Stepped displacer pistons
communicating with multiple adsorbent beds in a flow path
may be useful for separation with high recovery of trace
25 components from a carrier gas.

In the particular embodiment 500, the first component may
be dissolved or condensed into the liquid of the liquid
column 532. Thus, diaphragms separating the liquid in
30 cylinder 530 and 560 from first displacement chambers 515
and 545, which would be required in many applications of
the apparatus 500 as described to this point, are not
included in the examples to be described, so that the
free surface of the liquid is in contact with the gas in
35 the liquid displacement chambers. Extended surfaces 580
are provided in the liquid displacement chambers 515 and
545 to increase the area of contact between gas or vapour

in the chambers and the liquid. The extended surfaces
580 are formed of a wettable solid material, and may be
parallel plates, tubes, or a packing through which the
liquid free surfaces 582 oscillate up and down.

5

The feed supply means is shown as compressor 585
delivering the feed gas mixture through feed supply valve
587 to the first chamber 515 of the first working space,
and through feed supply valve 589 to the first chamber
10   545 of the second working space. The feed gas mixture
includes the strongly adsorbed first component which may
be dissolved or condensed into the liquid, and a
relatively inert carrier gas such as air which is the
second component. The purified second component is
15   delivered from second product delivery valves 512 and
542.

Since the first component is dissolved or condensed into
the liquid, the first product delivery means will deliver
20   liquid containing the first component. For the first
working space, the first product delivery means includes
a liquid level sensor 590, which controls a liquid
delivery valve 591 to discharge liquid containing the
first component from cylinder 530. For the second
25   working space, liquid level sensor 593 controls liquid
delivery valve 594 to discharge liquid containing the
first component from cylinder 560. Liquid supply valve
596 is used to supply liquid to the first end 531 of pipe
533, and liquid supply valve 598 is used to supply liquid
30   to the second end 561 of pipe 533. The liquid level
sensors 590 and 593 serve to regulate the liquid level in
the cylinders 530 and 560 by controlling the discharge of
excess liquid through valves 591 and 594.

35   <u>Example No. 2</u>

2087973

The first component in the feed gas may be a gas readily
or usefully dissolved in a suitable liquid, in which the
second component is relatively insoluble. An important
application is ozonation of water, in which ozone

5 delivered from a corona discharge apparatus at about 1%
concentration in oxygen is to be dissolved in water for
disinfection and destruction of organic pollutants.
While ozone is about ten times as soluble in water as
oxygen, the large excess of less soluble gas makes it

10 difficult to dissolve a substantial fraction of the ozone
without bulky and energy-intensive water contacting and
mixing devices. Thus, ozone generation systems are
frequently operated at the highest possible ozone exit
concentration to facilitate water contacting, but the

15 productivity and energy efficiency of corona discharge
ozone generators is greatly degraded at higher ozone
concentration. It is thus highly desirable to operate
the ozone generator at low ozone concentration (about 1%
O_3) to optimize its efficiency, while separating the

20 ozone/oxygen mixture downstream to achieve higher ozone
concentration for water contacting, while recycling the
oxygen to the ozone generator to reduce oxygen
consumption.

25 For this application, embodiment 500 is used not only to
concentrate the ozone, but also to dissolve the ozone
into water used as the displacement liquid; so that all
the ozone is dissolved into a high concentration ozonated
water stream as the first product; and no ozone leaves

30 the apparatus in the gas phase at dangerous
concentrations.

In the ozone application, the apparatus must use an
adsorbent in beds 505 and 535 which has a minimal effect

35 to catalyze ozone decomposition, and which is not
deactivated by contact at the second end of the beds with
saturated water vapour. Silica gel is known to be a

useful adsorbent for ozone separation. Silicalite (a low
alumina pentasil zeolite which is hydrophobic) may offer
superior properties in working with high water vapour
concentrations. Operation of the apparatus at cool
5   ambient or moderately refrigerated temperatures is
desirable to improve ozone solubility in water and uptake
on adsorbents, while reducing water vapour pressure.

The feed gas with ozone as the first component and oxygen
10   as the majority second component is introduced through
feed supply valves 587 and 589. Purified oxygen is
delivered from second product valves 512 and 542, for
recyle to the ozone generator. Feed water is introduced
through valves 596 and 598, and ozonated water is
15   delivered through valves 591 and 594 as the first
product. This ozonated water stream may be highly
concentrated, to the order of 15 mg/L O_3, and may be
externally injected and mixed into a larger water stream
to achieve typical potable water ozonation concentrations
20   of about 1 mg/l O_3. Ozone concentrations reached within
the chambers 515 and 545 will be limited by the rate of
ozone dissolution into water, balanced by the feed flow
rate approximately equal to the oxygen delivery rate.

25   Example No. 3

The first component in the feed gas may be a vapour, such
as a hydrocarbon or solvent vapour, carried in air as the
second component. An important application is recovery
30   of gasoline vapour mixed in air displaced from tanks
during vehicles refueling operations or tanker transfer
at terminals.   Venting of gasoline and other hydrocarbon
vapours to the atmosphere is an important source of urban
smog pollution, as well as a major economic loss.
35

The apparatus 500 purifies the air which may be released
to the environment from valves 512 and 542, while the

vapour is concentrated in the first chambers 515 and 545 and is condensed therein. The condensed first component joins the liquid, and is delivered as a liquid first product by valves 591 and 594. Heat of condensation is

5   removed by cooling jacket 565 (which may be disposed alternatively and more effectively with direct heat exchange to extended surfaces 580), and in part by removal of the first product.

10   The adsorbent in beds 505 and 535 must be selected to remain active with high concentrations of the first component vapour, and may be assisted in this regard by operating the adsorbent bed at a moderately elevated temperature established by heat exchangers 508 and 538,

15   or by cooling the liquid column 532 to a temperature below ambient. Heat provided at the second end of the adsorbent beds will assist powering the apparatus through the Stirling cycle, while of course increasing the cooling load at the first end of the adsorbent beds.

20

Figs. 7 and 8

Above described embodiments have shown two working spaces operating 180° out of phase, or one working space

25   operating 180° out of phase with a potential energy storage means other than a second similar working space, in either case coupling with a single primary liquid column as the kinetic energy storage means through which potential energy can be exchanged.

30

Instead of using one primary liquid column to exchange kinetic energy for the potential energy of the working space, it is also possible to have multiple liquid columns coupled to a single working space, and

35   oscillating in different phases, to combine the functions of (1) exchange of kinetic for potential energy external to the working space, and (2) achieving a phase shift

between volume changes in volume displacement chambers
along the flow path, so as to generate flow in the flow
path directed toward the first end at the first pressure
and toward the second end at the second pressure.

5   Multiple liquid columns may be coupled to multiple
working spaces in order to achieve a satisfactory balance
of potential and kinetic energy, and smoothed external
flows and power demand. In particular, a number of three
or more identical working spaces may be coupled together

10 by an equal number of identical liquid columns, each
liquid column coupled at one end to the first volume
displacement chamber of a working space and coupled at
the other end to the second volume displacement chamber
of an adjacent working space, so that the operating

15 phases of adjacent working spaces are equally separated
by a phase angle of 360° divided by the number of working
spaces. The following embodiment has three identical
working spaces cooperating as described with three
identical liquid columns, so that the operating phases of

20 the working spaces are equally separated by a phase angle
of 120°.

Embodiment 600 is shown in plan view in Fig. 7, and in a
partial elevation view in Fig. 8.   As shown in Fig. 7,

25 embodiment 600 has three identical working spaces 601,
602 and 603, and three oscillating liquid columns 605,
606 and 607. Fig. 8 is a plan view of working space 601
in isolation.

30 The first working space 601 has a flow path extending
from first end 610 through adsorbent bed 611 to an
intermediate node 612, and thence through adsorbent bed
613 to second flow path end 614. First end 610
communicates with a first volume displacement chamber 615

35 and a first product delivery valve 616. The intermediate
node 612 communicates with feed supply valve 617, which
receives feed gas mixture compressed to approximately the

second pressure from a feed supply means. Second end 614
communicates with a second volume displacement chamber
618 and a second product delivery valve 619. The first
volume displacement chamber 615 is coupled to first end
5 620 of liquid column 605, while the second volume
displacement chamber 618 is coupled to the second end 621
of liquid column 606.

Similarly second working space 602 has a flow path
10 extending from first end 630 through adsorbent bed 631 to
an intermediate node 632, and thence through adsorbent
bed 633 to second flow path end 634. First end 630
communicates with a first volume displacement chamber 635
and a first product delivery valve 636. The intermediate
15 node 632 communicates with feed supply valve 637, which
receives feed gas mixture compressed to approximately the
second pressure from a feed supply means. Second end 634
communicates with a second volume displacement chamber
638 and a second product delivery valve 639. The first
20 volume displacement chamber 635 is coupled to first end
640 of liquid column 606, while the second volume
displacement chamber 638 is coupled to the second end 641
of liquid column 607.

25 Likewise third working space 603 has a flow path
extending from first end 650 through adsorbent bed 651 to
an intermediate node 652, and thence through adsorbent
bed 653 to second flow path end 654. First end 650
communicates with a first volume displacement chamber 655
30 and a first product delivery valve 656. The intermediate
node 652 communicates with feed supply valve 657, which
receives feed gas mixture compressed to approximately the
second pressure from a feed supply means. Second end 654
communicates with a second volume displacement chamber
35 658 and a second product delivery valve 659. The first
volume displacement chamber 655 is coupled to first end
660 of liquid column 607, while the second volume

displacement chamber 658 is coupled to the second end 661
of liquid column 605.

By symmetry, the process is conducted identically in the
5   three working spaces but phased 120° apart, while volume
changes at the first and second ends of each liquid
column are equal in displacement but phased 180° apart.
Hence, in each working space the first and second volume
displacement chambers will have equal swept volume, while
10   the volume changes in the second chamber will have a
leading phase by 60° relative to volume changes in the
first chamber. With the liquid columns oscillating 120°
apart, the working pressure in the working spaces will
cycle between a lower first pressure and a higher second
15   pressure, with the flow in the flow path directed toward
the first end of each flow path at the first pressure and
toward the second end of the flow path at the second
pressure. Hence a less readily adsorbed first component
will be separated into the first product withdrawn by the
20   first product delivery valves, and a more readily
adsorbed seond component will be separated into the
second product withdrawn by the second product delivery
valves.

25   The process is started and operated by operating the feed
supply and first product delivery valves to be opened for
brief intervals in a sequence such as
617 - 656 - 637 - 616 - 657 - 636, so that the first,
second and third working spaces are operated and
30   energized in the order given. In the particular valve
logic described, the three second product delivery valves
are self-operating non-return valves. When the pressure
in a working space reaches the second pressure, the feed
supply valve will be opened for an interval to supply
35   feed gas and compression energy to that working space.
When the working pressure in the working space reaches
the first pressure, the first product delivery valve will

be opened for an interval to withdraw first product gas.
The operating pressure of the valves may be adjusted with
respect to the first and second pressures, and the valve
logic may be modified, according to actual energy losses
5   and the feed ratio of first and second components, so
that the apparatus functions with high energy efficiency.

As shown in Fig. 8, the volume of first volume
displacement chamber 615 is varied by a piston float 670
10 sealed from the liquid by an internally pressurized
double diaphragm, comprising diaphragms 671 and 672
enclosing an intermediate gas charged chamger 673, in
cylinder 674. The liquid enters the cylinder 674
vertically through port 675 from swirl chamber 676. As
15 seen in the plan view of Fig. 7, swirl chamber 676 is
configured as a volute with tangential entry from the
first end 620 of liquid column 605. It will be noted
that port 675 provides a lower stop to limit the downward
travel of piston float 670, while supporting diaphragm
20 672. The top 678 of cylinder 674 likewise provides an
upper stop to limit the upward travel of piston float
670, while supporting diaphragm 671. Thus, the double
diaphragm is protected from damage at either limit of
piston float 670 stroke.
25

Similarly, the volume of second volume displacement
chamber 618 is varied by a piston float 680 sealed from
the liquid by an internally pressurized double diaphragm,
comprising diaphragms 681 and 682 enclosing intermediate
30 gas charged chamber 683, in cylinder 684. The liquid
enters the cylinder 684 vertically through port 685 from
swirl chamber 686. As seen in the plan view of Fig. 7,
swirl chamber 686 is configured as a volute with
tangential entry from the second end 621 of liquid column
35 606.

52

Auxiliary safety devices may be provided to prevent
damage from excessive amplitudes of oscillation, and for
detecting diaphragm failures. Such devices may include
hydraulic cushions or deceleration valves to arrest the
5   motion of a piston float approaching too fast and too
closely its upper or lower reciprocation limits.
Auxiliary gas charged surge absorbers or relief valves
may be used to avoid overpressures in the liquid columns.
The gas charged intermediate chambers 673 and 683 of the
10   double diaphragms may be slightly overpressured with
respect to the adjacent volume displacement chamber and
liquid, and provided with differential pressure sensors
to detect any diaphragm failure.

15   INDUSTRIAL APPLICABILITY

The present invention is applicable to air separation,
hydrogen separation, ozone production and recovery of
hydrocarbon or solvent vapours, as outlined above, and
20   likewise to many other gas or vapour separations not
mentioned herein. The invention overcomes barriers to
the technical simplification and economic scale-up of
highly efficient and productive gas separation equipment,
by substituting oscillating liquid columns for complex
25   and costly low speed reciprocating machinery.

It will be understood that the different aspects of the
present invention may be expressed with much diversity
and in many combinations other than the specific examples
30   described above, under the scope of the following claims.

CLAIMS

1. A process for separating first and second components of a gas mixture to produce a product enriched in one of the first or second components, the first component being more readily adsorbed under increase of pressure relative to the second component which is less readily adsorbed under increase of pressure over an adsorbent material, such that the gas mixture is relatively enriched in the first component at a first lower pressure and is relatively enriched in the second component at a second higher pressure when the pressure is cycled between the first and second pressures at a cyclic frequency; providing for the process a flow path through an adsorbent bed of the adsorbent material in a working space; and the process having the cyclically repeated steps at the cyclic frequency of:

    (a)   introducing the gas mixture to the flow path,

    (b)   changing the volume of the working space, and thus generating cyclic pressure changes in the working space,

    (c)   cyclically reversing the direction of flow of the gas mixture in the flow path, while establishing a relative phase between the reversing flow and the said pressure changes,

    (d)   coordinating the relative phase of the said pressure changes within the working space and the reversing flow of the gas mixture in the flow path, so that the gas flow in the flow path is directed toward a first end of the flow

A

path when the pressure is approximately the
first lower pressure, and the gas flow in the
flow path is oppositely directed toward a
second end of the flow path when the pressure
is approximately the second higher pressure; so
as to achieve a separation of gas enriched in
the first component to the first end of the
flow path, and gas enriched in the second
component to the second end of the flow path,

(e) withdrawing the product from the flow path;

and the process is characterized by the additional
cyclic steps at the cyclic frequency of:

(f) storing potential energy in the working space when
the pressure in the working space is the higher
second pressure, the said potential energy
including energy of compression and adsorption
associated with changing the pressure in the
working space from the first pressure to the
second pressure,

(g) storing kinetic energy when the pressure in the
working space is changing between the first and
second pressures, with the said kinetic energy
at an intermediate pressure between the first
and second pressures approximately equal to the
potential energy stored in the previous step
(f),

(h) storing potential energy outside the working
space when the pressure in the working space is
the lower first pressure, with the said
potential energy approximately equal to the
kinetic energy stored in step (f),

(i) providing driving energy to the process to compensate for energy dissipation effects, and

(j) exchanging energy between the potential energy stored in step (f), the kinetic energy stored in step (g), and the potential energy stored in step (h), and so as to reduce the driving energy required.

2. The process of claim 1, in addition to steps (a)-(j) further including the steps of:

(k) withdrawing from adjacent the first end of the flow path a first product gas enriched in the first component,

(l) withdrawing from adjacent the second end of the flow path a second product gas enriched in the second component.

3. The process of claim 1, further characterized by

(a) generating cyclically oscillating flow of a displacement liquid to change the volume of the working space in step (b), and

(b) storing the kinetic energy in step (g) substantially as kinetic energy of the displacement liquid flowing to perform step (b).

4. The process of claim 3, further providing for the displacement liquid to have in part a vertical flow direction, so that potential energy is stored in step (h) as gravitational potential energy.

5.   The process of claim 3, further providing a second
      gas space whose volume and pressure are changed by the
      cyclic oscillating flow of the displacement liquid in
      step (b), but out of phase to the volume and pressure
      changes in the working space, so that potential energy
      is stored in step (h) as compression energy of gas in
      the second space.

6.   The process of claim 5, in which the second gas space
      is a second working space containing a second adsorbent
      bed, so that a gas separation process is also performed
      within the second working space.

7.   The process of claim 6 in which the working space and
      the second working space, and the gas separations
      performed therein, are substantially identical.

8.   The process of claim 1, further introducing a feed gas
      mixture in step (a) at a relatively higher pressure,
      and withdrawing a product gas in step (e) at a
      relatively lower pressure, thus contributing expansion
      energy within the working space as driving energy to
      accomplish step (i).

9.   The process of claim 1, further maintaining the second
      end of the flow path at a higher temperature than the
      first end of the flow path, so that driving energy in
      step (i) is contributed as thermal energy.

10.   The process of claim 9, in which the first component is
      nitrogen and the second component is oxygen,
      maintaining the second end of the flow path and an
      adjacent portion of the adsorbent bed at a temperature
      substantially higher than ambient temperature, and
      further characterized by providing the adsorbent
      material in a portion of the adsorbent bed adjacent the
      second end of the flow path as chabazite adsorbent

exchanged with a divalent metal cation.

11. The process of claim 10, in which the divalent metal cation is calcium.

12. The process of claim 11, in which the divalent metal cation is strontium.

13. The process of claim 3, further providing reversing pump means to control the oscillating flow of displacement liquid in step (b) and thus to contribute toward step (i).

14. The process of claim 3, in which the displacement liquid has low vapour pressure so as to avoid deactivating the adsorbent.

15. The process of claim 3, further preventing direct contact between the gas in the working space and the displacement liquid.

16. The process of claim 3, further providing a first chamber at the first end of the flow path, and a second chamber at the second end of the flow path; further changing the volumes of both the first chamber and the second chamber through the cyclically reversing flow of liquid generated in step (b) in order to change the pressure of the working space, and with the volume changes in the first chamber having a lagging phase relative to volume changes in the second chamber in order to achieve step (d), said lagging phase being substantially determined by the fluid inertia of liquid interposed between the first and second chambers.

17. The process of claim 16, further providing

a plurality of adsorbent beds in the flow path, and
providing an intermediate chamber communicating with a
node in the flow path between two adjacent adsorbent
beds; and changing the volume of the intermediate
chamber through the cyclically reversing flow of
displacement liquid generated in step (b), thus
contributing to pressure changes in the working space,
and with the volume changes in the intermediate chamber
having a lagging phase relative to volume changes in
the second chamber, and also with volume changes in the
first chamber having a lagging phase relative to volume
changes in the intermediate chamber, the relative phase
of volume changes in the chambers being substantially
determined by the fluid inertia of liquid interposed
between the chambers.

18. The process of claim 3, further providing chambers
within the working space, the said chambers
including a first chamber communicating with the
first end of the flow path and a second chamber
communicating with the second end of the flow path;
and cyclically changing the volume of the fiorst
chamber by the oscillating flow of displacement
liquid in step (b).

19. The process of claim 18, in which the displacement
liquid directly contacts the gas mixture in the
first chamber.

20. The process of claim 19, in which the first
component is dissolved in the displacement liquid;
and further withdrawing displacement liquid
containing the dissolved first component, and
replenishing the displacement liquid to replace that
withdrawn.

21. The process of claim 20 in which the first component is ozone, the second component is oxygen enriched air, and the displacement liquid is water.

22. The process of claim 19, in which the first component is a condensible vapour, and the displacement liquid includes the condensate of the first component; further withdrawing excess displacement liquid as a product of the process.

23. The process of claim 22, in which the first component is a hydrocarbon vapour, and the second component is air.

24. Apparatus for separating first and second components of a gas mixture, the first component being more readily adsorbed under increase of pressure relative to the second component which is less readily adsorbed under increase of pressure over an adsorbent material, such that the gas mixture contacting the adsorbent material is relatively enriched in the first component at a first lower pressure and is relatively enriched in the second component at a second higher pressure when the pressure is cycled between the first and second pressures at a cyclic frequency, the apparatus including:

   (a) a working space containing an adsorbent bed of the adsorbent material, a flow path through the adsorbent bed having a first end of the flow path and a second end of the flow path, a first volume displacement chamber communicating with the first end of the flow path, and a second volume displacement chamber communicating with the second end of the flow path,

   (b) cyclic volume displacement means to generate cyclic volume changes of the first and second volume displacement chambers, and to coordinate cyclic volume changes of the first and second volume displacement chambers, at a cyclic frequency and with a relative phase so that volume changes in the first volume displacement chamber have a lagging phase with respect to volume changes in the second volume displacement chamber, so as to cyclically change the pressure in the working space between the first pressure and the

C.

second pressure, and to cyclically reverse the direction of flow of the gas mixture in the flow path directed toward the first end of the flow path when the pressure is approximately the first lower pressure and oppositely directed toward the second end of the flow path when the pressure is approximately the second higher pressure, and so as to achieve a separation of gas enriched in the first component toward the first end of the flow path, and gas enriched in the second component toward the second end of the flow path, and

(c)   a feed supply valve to introduce the gas mixture to the flow path, and a product delivery valve to remove the product from the flow path;

and the apparatus characterized by including:

(d)   second potential energy storage means outside the working space, to cyclically store potential energy approximately equal to the potential energy stored in the working space substantially as energy of compression and adsorption when the pressure in the working space is changed from the first pressure to the second pressure,

(e)   kinetic energy storage means cooperating with the cyclic volume displacement means, to cyclically store kinetic energy approximately equal to the said potential energy when the pressure is intermediate between the first and second pressures, and to exchange energy between the potential energy storage means and the energy of compression and adsorption in the working space, and

(f)   means to provide driving energy to the process to compensate for energy dissipation effects and any imbalance of energy stored as potential and kinetic energy.

25. The apparatus of claim 24, wherein the kinetic energy storage means is characterized as a liquid column in an elongated pipe, the liquid column having first and second ends, with

    (a)   the first end of the liquid column coupled to a volume displacement chamber of the working space, so that movement of the liquid column in the pipe is coupled to volume changes of the working space so as to change the pressure of the working space, so that potential energy of compression and adsorption is stored in the working space when the pressure is the second higher pressure,

    (b)   the second end of the liquid column coupled to the second potential energy storage means so that movement of the liquid column stores potential energy in the second potential energy storage means when the pressure in the working space is the first lower pressure,

    (c)   the means to provide driving energy maintains oscillating displacements of the liquid column at the cyclic frequency, and

    (d)   kinetic energy is stored substantially in the moving fluid mass of the liquid column when the pressure in the working space is changing between the first and second pressures.

26. The apparatus of claim 25, wherein an end of the liquid column is coupled to a volume displacement chamber by a flexible diaphragm isolating the liquid from the gas in the chamber.

27. The apparatus of claim 25, wherein an end of the liquid column is coupled to a volume displacement chamber by a piston float within a cylinder to isolate the liquid from the gas in the chamber.

28. The apparatus of claim 26, in which the piston float is sealed to the cylinder by an internally pressurized double diaphragm.

C.

2087973

29. The apparatus of claim 25, wherein an end of the liquid column is coupled to a volume displacement chamber by the free surface of the liquid in direct contact with the gas in the chamber.

30. The apparatus of claim 24, in which the second potential energy storage means is another working space similar to the working space but operated in different phase.

31. The apparatus of claim 25, in which the second potential energy storage means is a gas charged chamber communicating to the pipe at the other end of the liquid column from the working space.

32. The apparatus of claim 25, in which the second potential energy storage means is a vertical portion of the liquid column at its other end opposite from the working space, so that gravitational potential energy is stored by liquid level differences between the ends of the liquid column.

33. The apparatus of claim 25, in which the liquid column is a primary liquid column coupled to the second volume displacement chamber; and means to coordinate cyclic volume changes of the first and second volume displacement chambers, with the volume changes in the first volume displacement chamber having a lagging phase with respect to volume changes in the second volume displacement chamber, is provided as a secondary liquid column coupled at opposite ends to the first and second volume displacement chambers, with the said lagging phase established by the fluid inertia of said secondary liquid column.

34. The apparatus of claim 25, in which the liquid column is coupled to the first volume displacement chamber; and means to coordinate cyclic volume changes of the first and second volume displacement chambers, with the volume changes in the first volume displacement chamber having a lagging phase with respect to volume changes in the second volume displacement chamber, is provided as a displacer piston to generate opposite volume displacements in the second volume displacement chamber
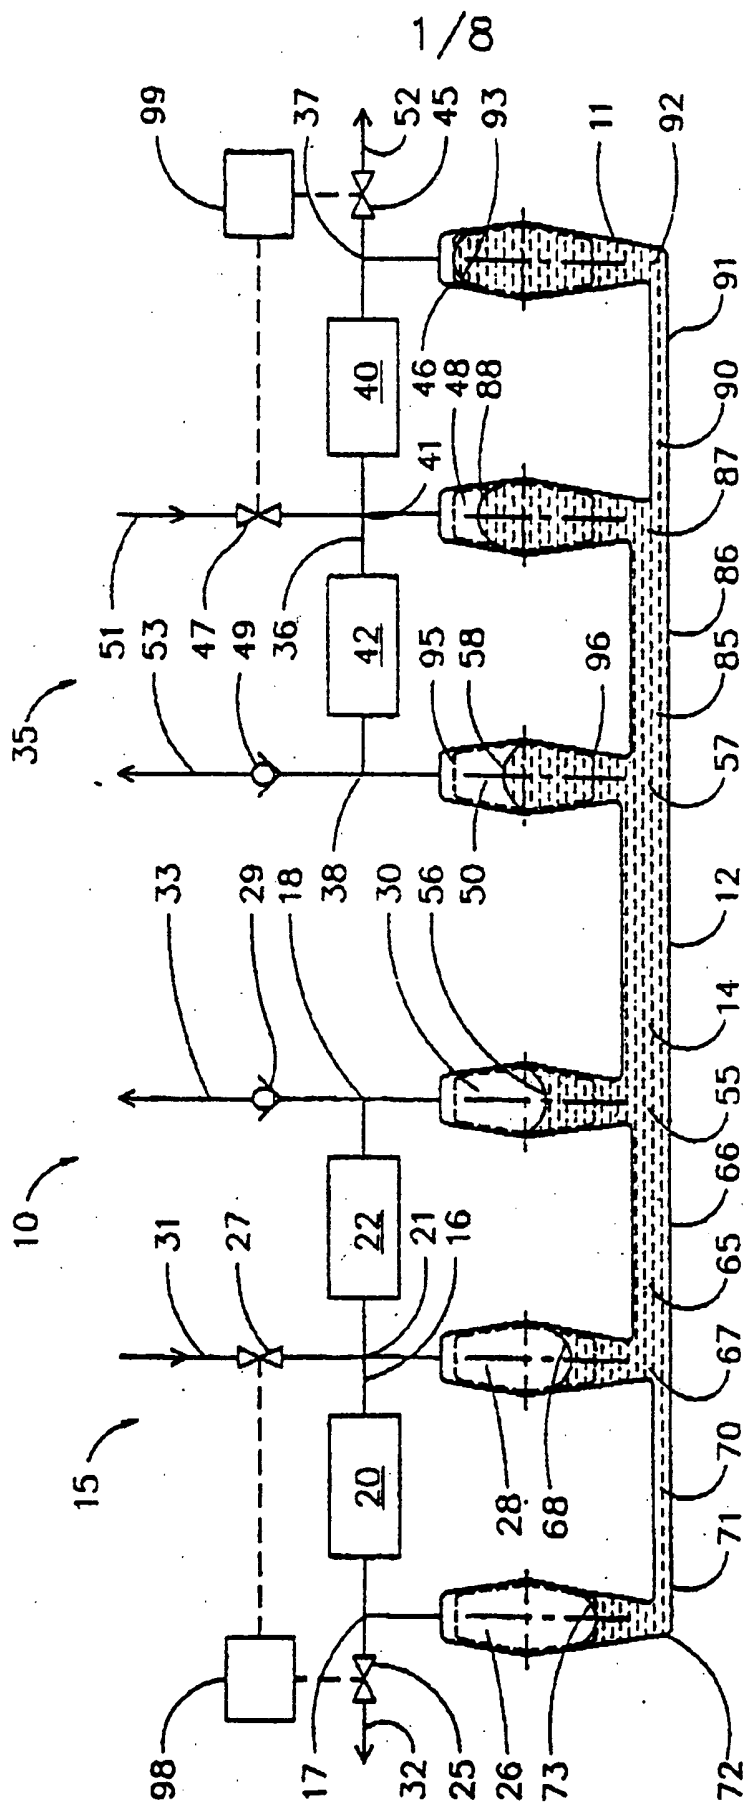
C

and in a displacer chamber communicating to the first volume displacement chamber, with displacer drive means to reciprocate the displacer piston at the cyclic frequency.

35. The apparatus of claim 25, in which the liquid column is a primary liquid column coupled to the second volume displacement chamber of the working space; and further including in the working space a second adsorbent bed communicating to the flow path, and an intermediate volume displacement chamber communicating to the second adsorbent bed; the apparatus further including a secondary liquid column coupled to the second and intermediate volume displacement chambers so that volume displacements in the intermediate volume displacement chamber will have a lagging phase with respect to volume changes in the second volume displacement chamber, and another secondary liquid column coupled to the first and intermediate volume displacement chambers so that volume displacements in the first volume displacement chamber will also have a lagging phase.

36. The apparatus of claim 24, further including a feed supply valve to introduce feed gas mixture to the working space, and a product delivery valve to withdraw a product gas from the working space, and further characterized by:

    (a)   valve control means to open the feed supply valve at a relatively higher pressure, and to open the product delivery valve at a relatively lower pressure, so as to provide compression energy within the working space as driving energy for the apparatus.

37. The apparatus of claim 24, with heat exchange means to maintain the temperature of the second end of the flow path and the second volume displacement chamber at a higher temperature relative to the temperature of the first end of the flow path and the first volume displacement chamber, so as to provide thermal energy as driving energy to the apparatus.

38. The apparatus of claim 25, with flow control means to control oscillating flow of liquid in the liquid column.

39.   The apparatus of claim 38, in which the flow control means is a reversible pump.

40.   The apparatus of claim 39, in which the liquid of the liquid column is electrically conductive, and the reversible pump is an electromagnetic pump.

41.   The apparatus of claim 38, in which the flow control means is a throttle valve.

42.   The apparatus of claim 25, with a shut-off valve in the pipe, with control means to close the valve so as to stop flow in the pipe during intervals while the pressure in the working space is the first pressure and while the pressure in the working space is the second pressure, so as to hold the stored potential energy during such intervals and thus to extend the cycle period beyond the resonant period of the liquid column in the apparatus, and to open the valve to release the stored potential energy for exchange with kinetic energy of the liquid column while the pressure is changing between the first and second pressures.

43.   The apparatus of claim 25, with a number of working spaces similar to the working space, and including a second working space and a third working space cooperating with the working space, each of the second and third working spaces being similar to the first working space, and each working space having a first volume displacement chamber and a second volume displacement chamber communicating with respectively first and second ends of a flow path through an adsorbent bed; and with a number of liquid columns cooperating with the working spaces, the number of liquid columns being equal to the number of working spaces, each liquid column having a first end coupled to the first volume displacement chamber of a working space and a second end coupled to the second volume displacement chamber of another working space; and with valve control means to control the opening of a feed supply valve and a product delivery valve for each working space, such that the operating phases of the working spaces are separated by an equal phase angle of 360° divided by the number of working spaces.

C

44. The apparatus of claim 43, in which the number of working spaces is three and the number of liquid columns is three, so that the operating phases of the working spaces are equally separated by a phase angle of 120°.

45. The apparatus of claim 38, with a liquid column coupled to the first volume displacement chamber, and with a piston float in the first volume displacement chamber insulating the gas in the first volume displacement chamber from the liquid in the said liquid column.
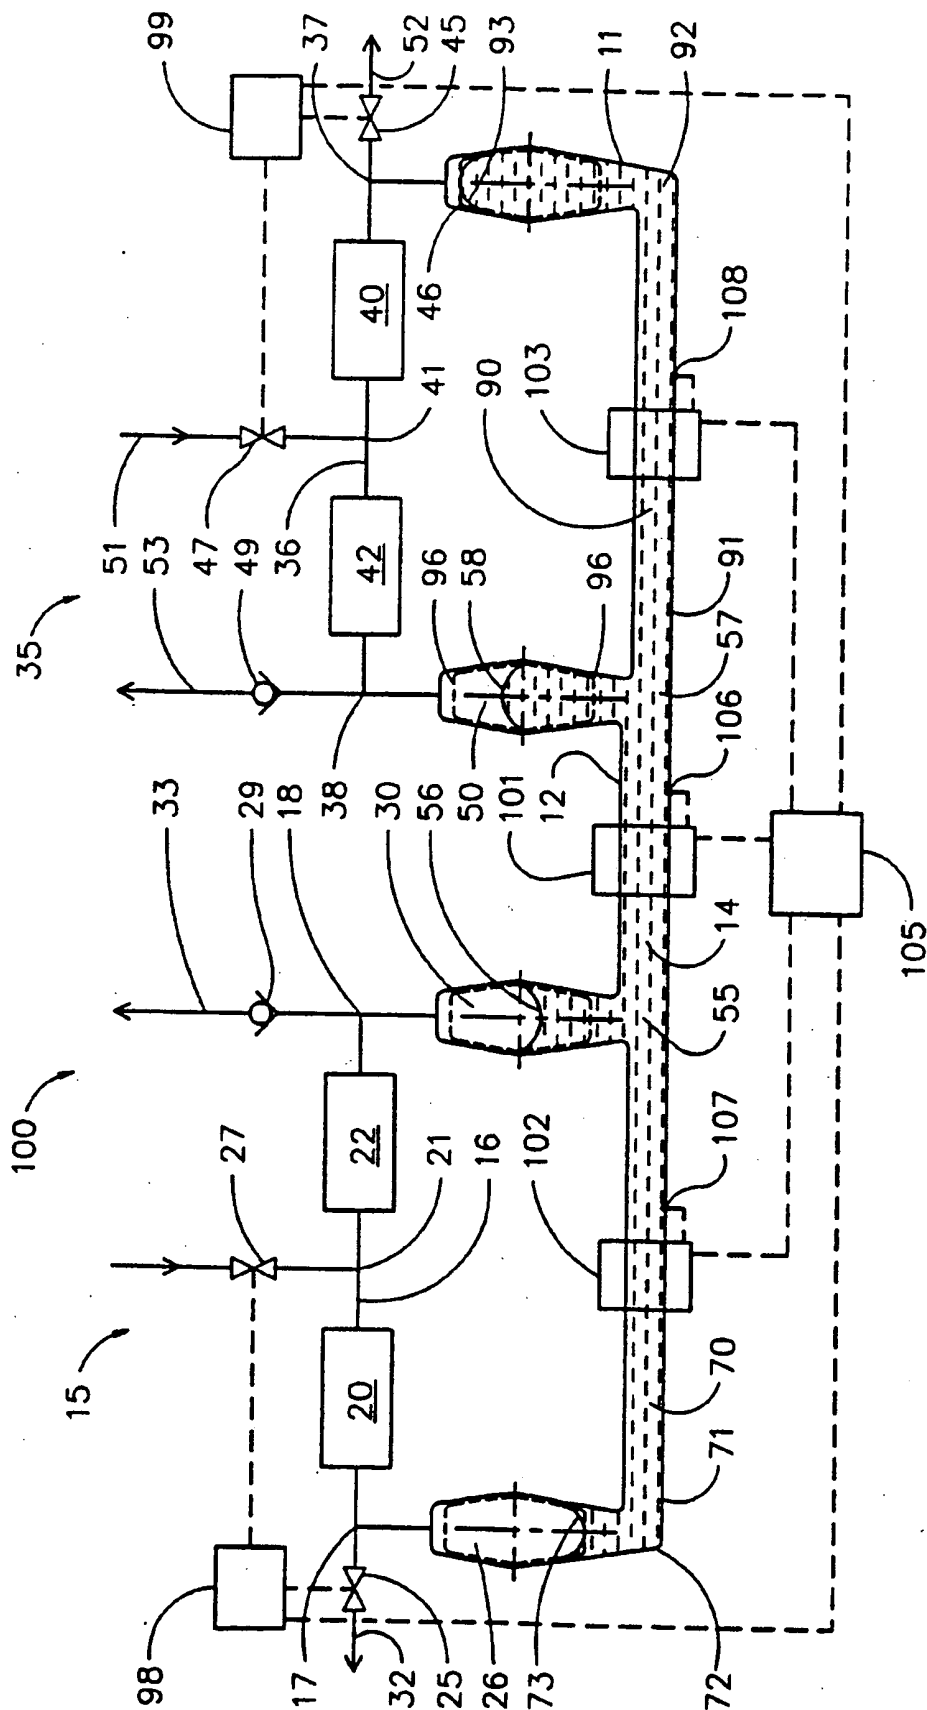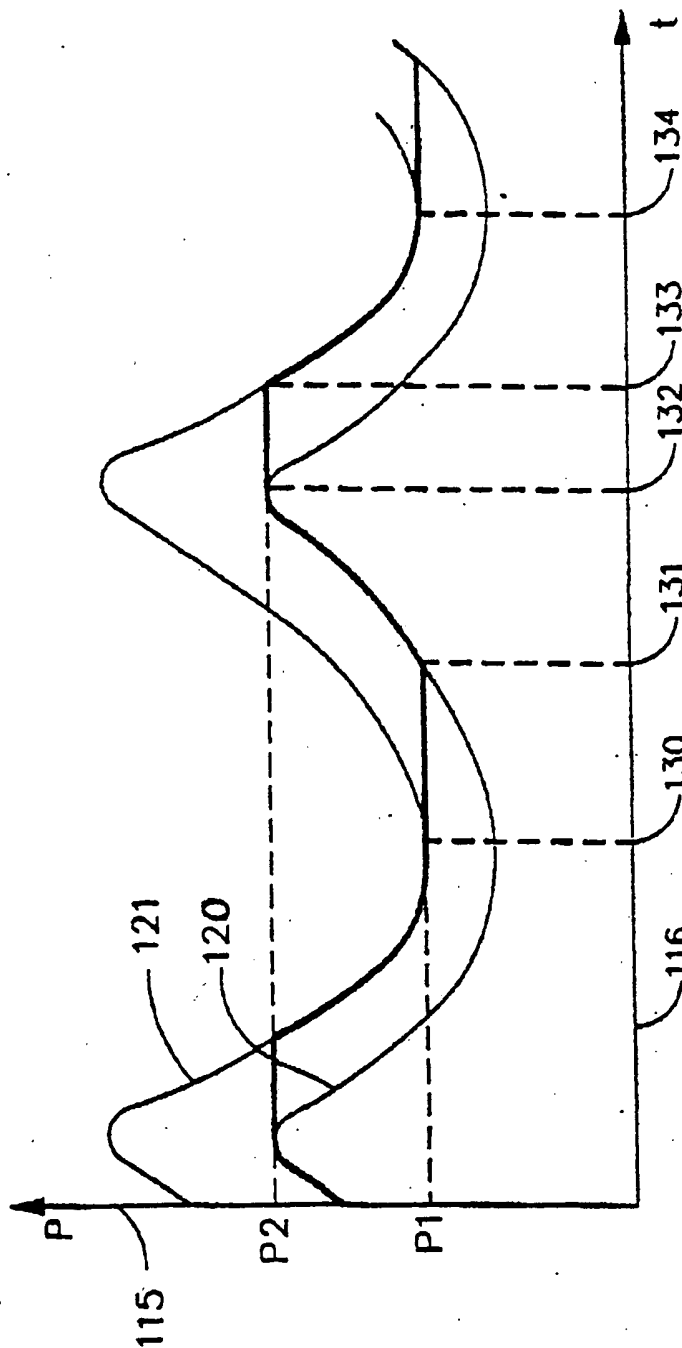
C

1/8

2087973

FIG. 1

2087973

2/8

FIG. 2

2087973

FIG. 3
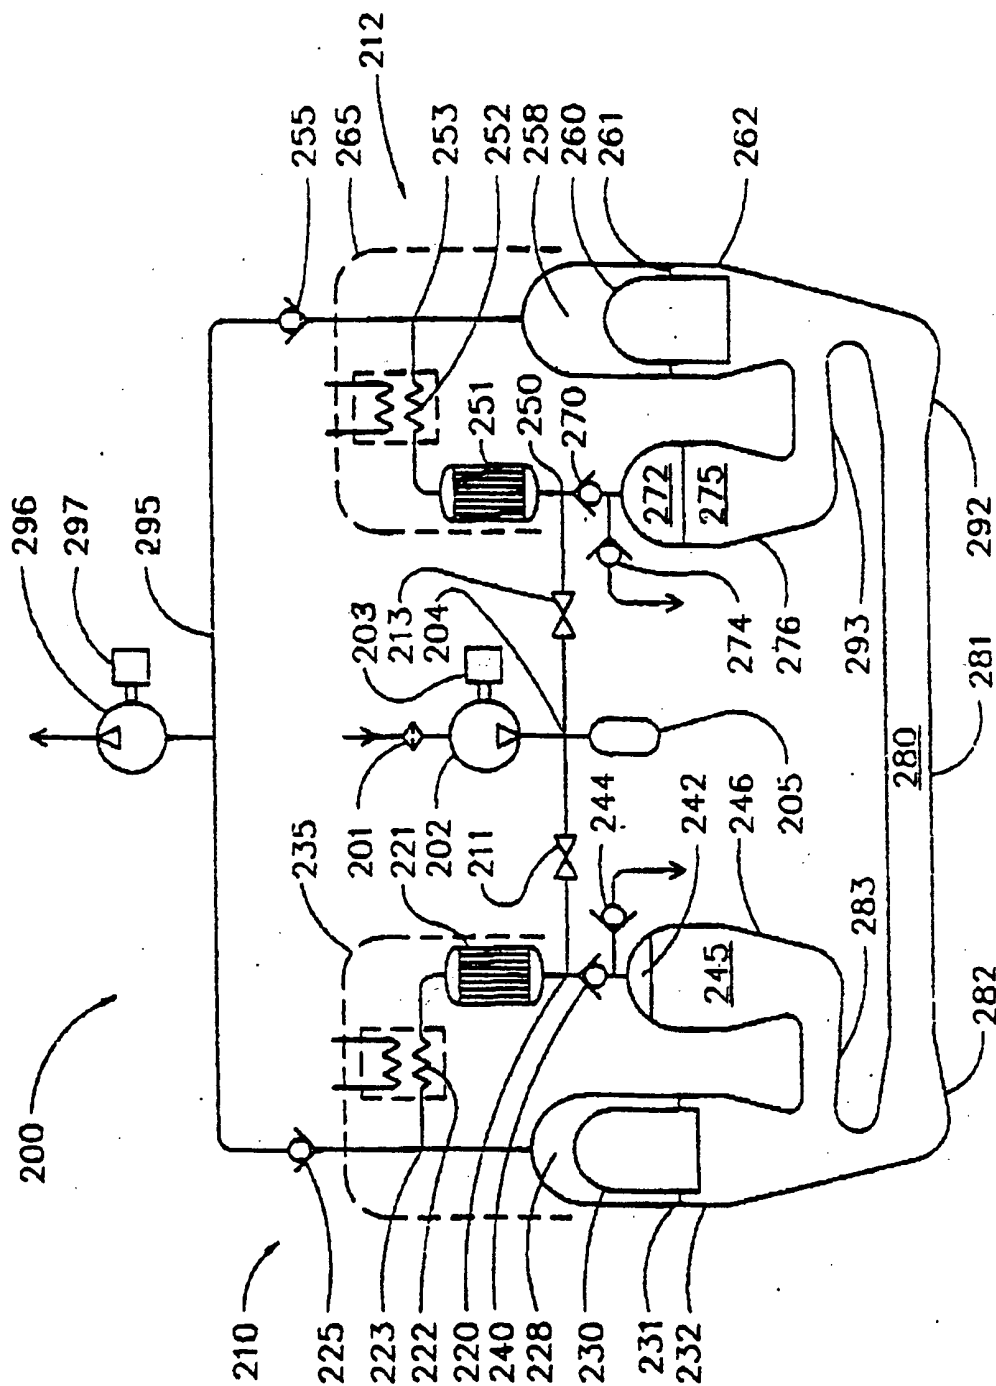
FIG. 4

2087973

5/8

FIG. 5

2087973

FIG. 8